


ISO

Tools for Internal Thread

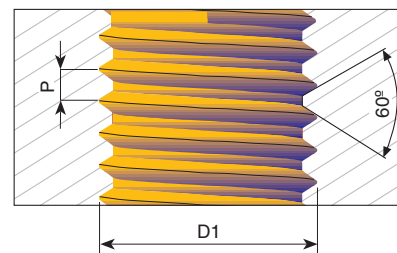

For thread depth up to $2 \times D1$

Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
0.25	M1	MTS03007C2 0.25 ISO	3	0.72	3	2.5	39
0.25	M1.2	MTS03009C3 0.25 ISO	3	0.90	3	3.0	39
0.4	M2	MTS06016C4 0.4 ISO	6	1.55	3	4.5	58
0.4	M2	MTS06016C4 0.4 ISO-L	6	1.55	3	4.5	105
0.45	M2.2	MTS06017C5 0.45 ISO	6	1.65	3	5.0	58
0.45	M2.5	MTS0602C5 0.45 ISO	6	1.95	3	5.5	58
0.45	M2.5	MTS0602C5 0.45 ISO-L	6	1.95	3	5.5	105
0.5	M3	MTS06024C6 0.5 ISO	6	2.35	3	6.5	58
0.5	M3	MTS06024C6 0.5 ISO-L	6	2.35	3	6.5	105
0.6	M3.5	MTS06028C7 0.6 ISO	6	2.75	3	7.5	58
0.7	M4	MTS06031C9 0.7 ISO	6	3.10	3	9.0	58
0.75	M10	MTS0808D25 0.75 ISO	8	8.00	4	25.0	64
0.8	M5	MTS06038C12 0.8 ISO	6	3.80	3	12.5	58
1.0	M6	MTS06047C14 1.0 ISO	6	4.65	3	14.0	58
1.25	M8	MTS0606C18 1.25 ISO	6	5.95	3	18.0	58
1.5	M10	MTS08078C23 1.5 ISO	8	7.80	3	23.0	64
1.75	M12	MTS1009C26 1.75 ISO	10	9.00	3	26.0	73
2.0	M16	MTS12118D35 2.0 ISO	12	11.80	4	35.0	84
2.5	M20	MTS1615E43 2.5 ISO	16	15.00	5	43.0	105

For thread depth up to $3 \times D1$

Pitch mm	D1	Ordering Code	d	D	No. of Flutes	I	L
* 0.3	M1.4	MTS03011C4 0.3 ISO	3	1.05	3	4.0	39
* 0.35	M1.6	MTS03012C5 0.35 ISO	3	1.20	3	4.8	39
* 0.4	M2	MTS03016C6 0.4 ISO	3	1.55	3	6.0	39
0.45	M2.5	MTS0602C7 0.45 ISO	6	1.95	3	7.5	58
0.5	M3	MTS06024C9 0.5 ISO	6	2.35	3	9.5	58
0.5	M3	MTS06024C9 0.5 ISO-L	6	2.35	3	9.5	105
0.6	M3.5	MTS06028C10 0.6 ISO	6	2.75	3	10.5	58
0.7	M4	MTS06031C12 0.7 ISO	6	3.10	3	12.5	58
0.7	M4	MTS06031C12 0.7 ISO-L	6	3.10	3	12.5	105
0.8	M5	MTS06038C16 0.8 ISO	6	3.80	3	16.0	58
0.8	M5	MTS06038C16 0.8 ISO-L	6	3.80	3	16.0	105
1.0	M6	MTS06047C20 1.0 ISO	6	4.65	3	20.0	58
1.0	M6	MTS06047C20 1.0 ISO-L	6	4.65	3	20.0	105
1.25	M8	MTS0606C24 1.25 ISO	6	5.95	3	24.0	58

Order example: MTS 06024C9 0.5 ISO MT7

*Specially designed for the production of dental implants


- Machining Titanium, surgical stainless steels and hardened materials up to 45 HRc.
- Suitable for high speed air turbine machines (30,000-40,000 RPM) and for standard machining centers (6,000 RPM and higher).
- Can also be used for general purpose threading.

Mini Mill Thread MTS and MTI types

MT7 Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

MT8 Sub-Micron Grade with Aluminium Titanium Nitride (AlTiN) multi-layer coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

ISO Standard	Material	Cutting Speed m/min	Feed mm/tooth													
			Cutting Diameter = D													
			ø1	ø1.5	ø2	ø3	ø4	ø5	ø6	ø7	ø8	ø9	ø10	ø12	ø14	ø16
P	Low & Medium Carbon Steels < 0.55%C	60-120	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
	High Carbon Steels ≥ 0.55%C	60- 90	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.14	0.14	0.16	0.17	0.18
	Alloy Steels, Treated Steels	50- 80	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14
M	Stainless Steels - Free Cutting	70-100	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
	Stainless Steel-Austenitic	60- 90	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
	Cast Steels	70- 90	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14
K	Cast Iron	40- 80	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
N	Aluminium ≤10%Si, Copper	100-200	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
	Aluminium >10%Si	60-140	0.03	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.14
	Synthetics, Duroplastics, Thermoplastics	50-200	0.09	0.10	0.11	0.12	0.14	0.16	0.18	0.19	0.19	0.19	0.19	0.19	0.20	0.20
S	Nickel Alloys and Titanium Alloys	20-40	0.03	0.03	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.08

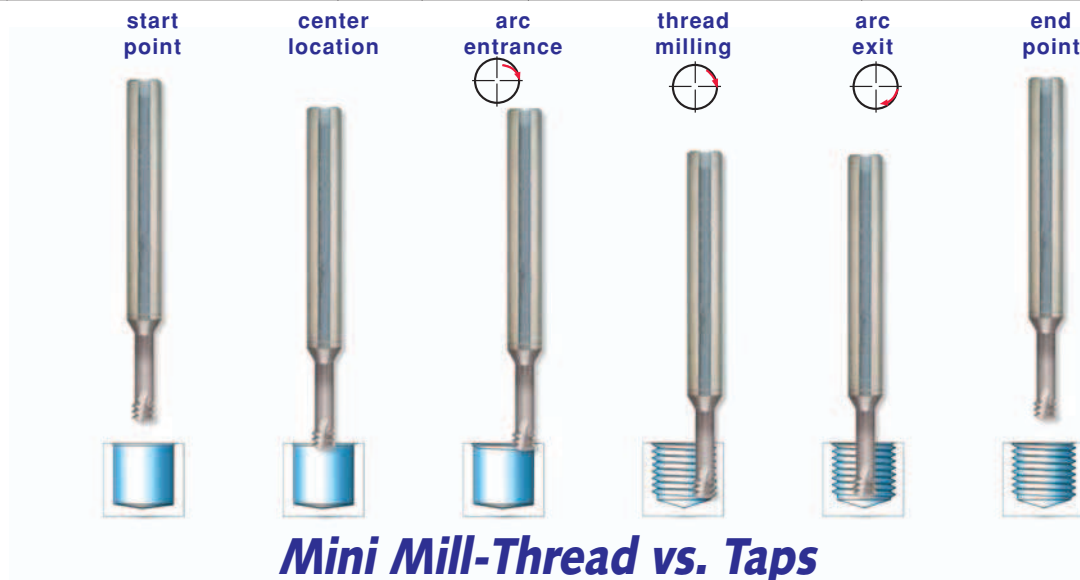

Mini Mill-Thread vs. Taps

Features	Mini Mill-Thread	Taps
Thread surface quality	High	Medium
Thread geometry	Very accurate	Medium
Thread tolerances	4H, 5H, 6H with std cutter	6H with standard tap, 4H with specific tap
Machining time	Same as tap or shorter	Short
Tool breakage	Almost not possible	Could happen often
Machining load	Very low	High
Range of thread diameters	Wide range of diameters	Specific tap for each diameter
Right/Left hand threading	Same cutter	Specific tap for each
Geometric shape	Full profile	Partial profile