
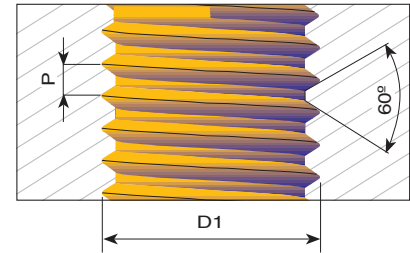


UN

Tools for Internal Thread

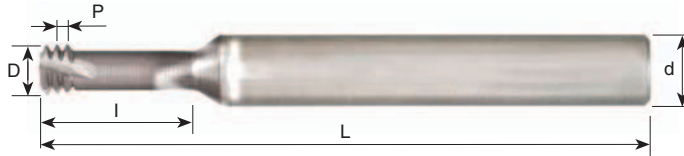

For thread depth up to $3 \times D1$

Pitch TPI	UNC	UNF	Ordering Code	d	D	No. of Flutes	l	L
80		0	MTS06012C4 80 UN	6	1.15	3	4.0	58
* 72		1	MTS03015C6 72 UN	3	1.45	3	6.0	39
56	2	3	MTS03016C6 56 UN	3	1.65	3	6.6	39
56	2	3	MTS06016C6 56 UN	6	1.65	3	6.6	58
56	2	3	MTS06016C6 56 UN-L	6	1.65	3	6.6	105
40	4		MTS06021C8 40 UN	6	2.10	3	8.0	58
40	4		MTS06021C8 40 UN-L	6	2.10	3	8.0	105
40	5	6	MTS06024C9 40 UN	6	2.45	3	9.6	58
32	6		MTS03025C10 32 UN	3	2.55	3	10.5	39
32	6		MTS06025C10 32 UN	6	2.55	3	10.5	58
32	6		MTS06025C10 32 UN-L	6	2.55	3	10.5	105
32	8		MTS06032C12 32 UN	6	3.20	3	12.5	58
32	8		MTS06032C12 32 UN-L	6	3.20	3	12.5	105
32		10	MTS06037C15 32 UN	6	3.70	3	15.0	58
32		10	MTS06037C15 32 UN-L	6	3.70	3	15.0	105
28		1/4	MTS0605C19 28 UN	6	5.00	3	19.0	58
24		5/16, 3/8	MTS08066C24 24 UN	8	6.60	3	24.0	64
20	1/4		MTS06047C19 20 UN	6	4.75	3	19.0	58
20	1/4		MTS06047C19 20 UN-L	6	4.75	3	19.0	105
18	5/16		MTS0606C23 18 UN	6	6.00	3	23.0	58

Order example: MTS 0605C19 28 UN MT7

*Specially designed for the production of dental implants


- Machining Titanium, surgical stainless steels and hardened materials up to 45 HRc.
- Suitable for high speed air turbine machines (30,000-40,000 RPM) and for standard machining centers (6,000 RPM and higher).
- Can also be used for general purpose threading.

Mini Mill Thread MTS and MTI types

MT7 Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, which can be used with all materials; it should be run at medium to high cutting speeds.

MT8 Sub-Micron Grade with Aluminium Titanium Nitride (AlTiN) multi-layer coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, for high performance, and normal machining conditions. General purpose for all materials.

ISO Standard	Material	Cutting Speed m/min	Feed mm/tooth													
			Cutting Diameter = D													
			ø1	ø1.5	ø2	ø3	ø4	ø5	ø6	ø7	ø8	ø9	ø10	ø12	ø14	ø16
P	Low & Medium Carbon Steels < 0.55%C	60-120	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
	High Carbon Steels ≥ 0.55%C	60- 90	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.14	0.14	0.16	0.17	0.18
	Alloy Steels, Treated Steels	50- 80	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14
M	Stainless Steels - Free Cutting	70-100	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
	Stainless Steel-Austenitic	60- 90	0.02	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
	Cast Steels	70- 90	0.03	0.04	0.04	0.05	0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13	0.14
K	Cast Iron	40- 80	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
N	Aluminium ≤10%Si, Copper	100-200	0.04	0.05	0.05	0.07	0.09	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18
	Aluminium >10%Si	60-140	0.03	0.03	0.03	0.04	0.05	0.06	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.14
	Synthetics, Duroplastics, Thermoplastics	50-200	0.09	0.10	0.11	0.12	0.14	0.16	0.18	0.19	0.19	0.19	0.19	0.19	0.20	0.20
S	Nickel Alloys and Titanium Alloys	20-40	0.03	0.03	0.03	0.04	0.04	0.05	0.06	0.06	0.06	0.07	0.07	0.07	0.08	0.08

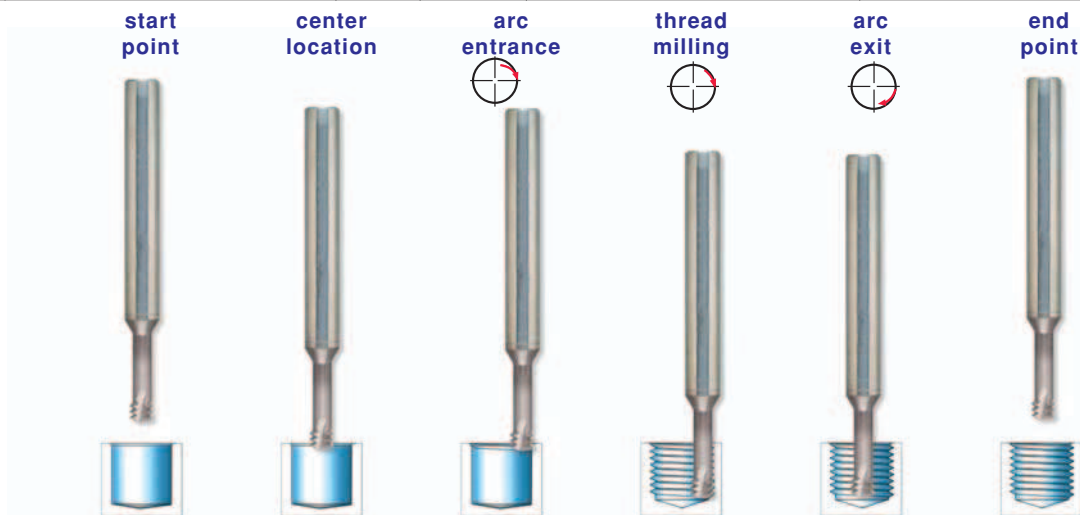

Mini Mill-Thread vs. Taps

Features	Mini Mill-Thread	Taps
Thread surface quality	High	Medium
Thread geometry	Very accurate	Medium
Thread tolerances	4H, 5H, 6H with std cutter	6H with standard tap, 4H with specific tap
Machining time	Same as tap or shorter	Short
Tool breakage	Almost not possible	Could happen often
Machining load	Very low	High
Range of thread diameters	Wide range of diameters	Specific tap for each diameter
Right/Left hand threading	Same cutter	Specific tap for each
Geometric shape	Full profile	Partial profile