


## *Spiral inserts and toolholders for finishing*

- Milling a 90° shoulder with variety of corner radiuses
- Maximum depth of cut - 37 mm

### **H23 Toolholder**

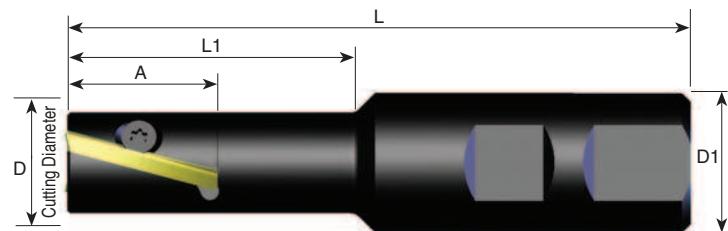


Ordering Code	Insert size A	D	D1	L	L1	No. of Insert	Screw	Key
<b>SRH23-2</b>	27	23	25	110	50	2	S23	K21


### **H23F Finishing Inserts**

R	Ordering Code
0.2	<b>H23 F R0.2</b>
0.5	<b>H23 F R0.5</b>
1.0	<b>H23 F R1.0</b>

Spiral inserts have one cutting edge

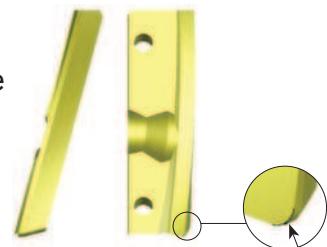

### **H32 Toolholder**

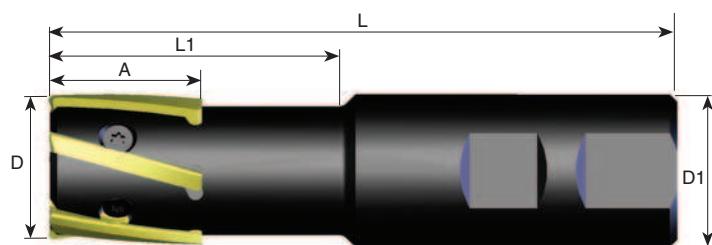


Ordering Code	Insert size A	D	D1	L	L1	No. of Insert	Screw	Key
<b>SRH32-5</b>	32	32	32	130	60	5	S32	K22

### **H32F Finishing Inserts**

R	Ordering Code
0.2	<b>H32 F R0.2</b>
0.5	<b>H32 F R0.5</b>
1.0	<b>H32 F R1.0</b>

Spiral inserts have one cutting edge

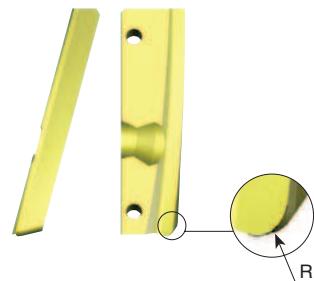

## *Spiral Finish Speed and Feed Selection*

ISO	Materials	V <sub>c</sub> (mm)	h <sub>m</sub> (mm)
<b>P</b>	Low and Medium Carbon Steels	200-330	0.05-0.15
	High Carbon Steels	170-235	0.05-0.13
	Alloy Steels, Treated Steels	100-195	0.05-0.13
<b>M</b>	Stainless Steels	180-230	0.04-0.13
	Cast Steels	180-230	0.05-0.12
<b>K</b>	Cast Iron	200-350	0.05-0.11
<b>N</b>	Non- Ferrous and Aluminum	500-1100	0.05-0.15
	Synthetics, Duroplastics, Thermoplastics	400-1500	0.05-0.15
<b>S</b>	Nickel Alloys, Titanium Alloys	30-55	0.04-0.07

D = cutting diameter	ø23	ø32	ø45	ø63
a <sub>p</sub> max	27	32	37	38

$$f_z = h_m \times \sqrt{\frac{D}{a_e}}$$

h<sub>m</sub> = average chip load

f<sub>z</sub> = tooth load

D	ø23		ø32		ø45		ø63	
h <sub>m</sub>	0.05	0.15	0.05	0.15	0.05	0.15	0.05	0.15
a <sub>e</sub>	f <sub>z</sub>							
2	0.17	0.51	0.20	0.60	0.24	0.71	0.28	0.84
6	0.10	0.29	0.12	0.35	0.14	0.41	0.16	0.49
12	0.07	0.21	0.08	0.24	0.10	0.29	0.11	0.34
18	0.06	0.17	0.07	0.20	0.08	0.24	0.09	0.28
24	0.05	0.15	0.06	0.17	0.07	0.21	0.08	0.24
30	0.04	0.13	0.05	0.15	0.06	0.18	0.07	0.22
36	0.04	0.12	0.05	0.14	0.06	0.17	0.07	0.20

