
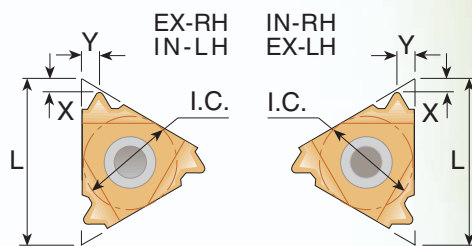


ISO - metrisch



Steigung mm	L	I.C. Zoll	Außen Bestellcode Rechts	X	Y	Innen Bestellcode Rechts	X	Y
0.5	11	1/4				11 IR Z 0.5 ISO	0.7	0.6
0.75	11	1/4				11 IR Z 0.75 ISO	0.7	0.6
1.0	11	1/4				11 IR Z 1.0 ISO	0.7	0.7
1.25	11	1/4				11 IR Z 1.25 ISO	0.7	0.8
1.5	11	1/4				11 IR Z 1.5 ISO	0.7	1.0
1.75	11	1/4				11 IR Z 1.75 ISO	0.7	1.1
2.0	11	1/4				11 IR Z 2.0 ISO	0.7	0.9
0.5	16	3/8	16 ER Z 0.5 ISO	1.3	0.6	16 IR Z 0.5 ISO	1.3	0.6
0.75	16	3/8	16 ER Z 0.75 ISO	1.3	0.6	16 IR Z 0.75 ISO	1.3	0.6
1.0	16	3/8	16 ER Z 1.0 ISO	1.3	0.7	16 IR Z 1.0 ISO	1.3	0.7
1.25	16	3/8	16 ER Z 1.25 ISO	1.3	0.9	16 IR Z 1.25 ISO	1.3	0.9
1.5	16	3/8	16 ER Z 1.5 ISO	1.3	1.0	16 IR Z 1.5 ISO	1.3	1.0
1.75	16	3/8	16 ER Z 1.75 ISO	1.3	1.2	16 IR Z 1.75 ISO	1.3	1.2
2.0	16	3/8	16 ER Z 2.0 ISO	1.3	1.3	16 IR Z 2.0 ISO	1.3	1.3
2.5	16	3/8	16 ER Z 2.5 ISO	1.3	1.5	16 IR Z 2.5 ISO	1.3	1.5
3.0	16	3/8	16 ER Z 3.0 ISO	1.3	1.6	16 IR Z 3.0 ISO	1.3	1.5
3.5	22	1/2	22 ER Z 3.5 ISO	1.7	2.3	22 IR Z 3.5 ISO	1.6	2.3
4.0	22	1/2	22 ER Z 4.0 ISO	1.7	2.3	22 IR Z 4.0 ISO	1.6	2.3
4.5	22	1/2	22 ER Z 4.5 ISO	1.7	2.4	22 IR Z 4.5 ISO	1.6	2.4
5.0	22	1/2	22 ER Z 5.0 ISO	1.4	2.5	22 IR Z 5.0 ISO	1.4	2.3
5.5	22	1/2	22 ER Z 5.5 ISO	1.1	2.6	22 IR Z 5.5 ISO	1.1	2.3
6.0	22	1/2	22 ER Z 6.0 ISO	0.9	2.7	22 IR Z 6.0 ISO	0.9	2.4

Bestellbeispiel: 16 IR Z 1.5 ISO BMA