





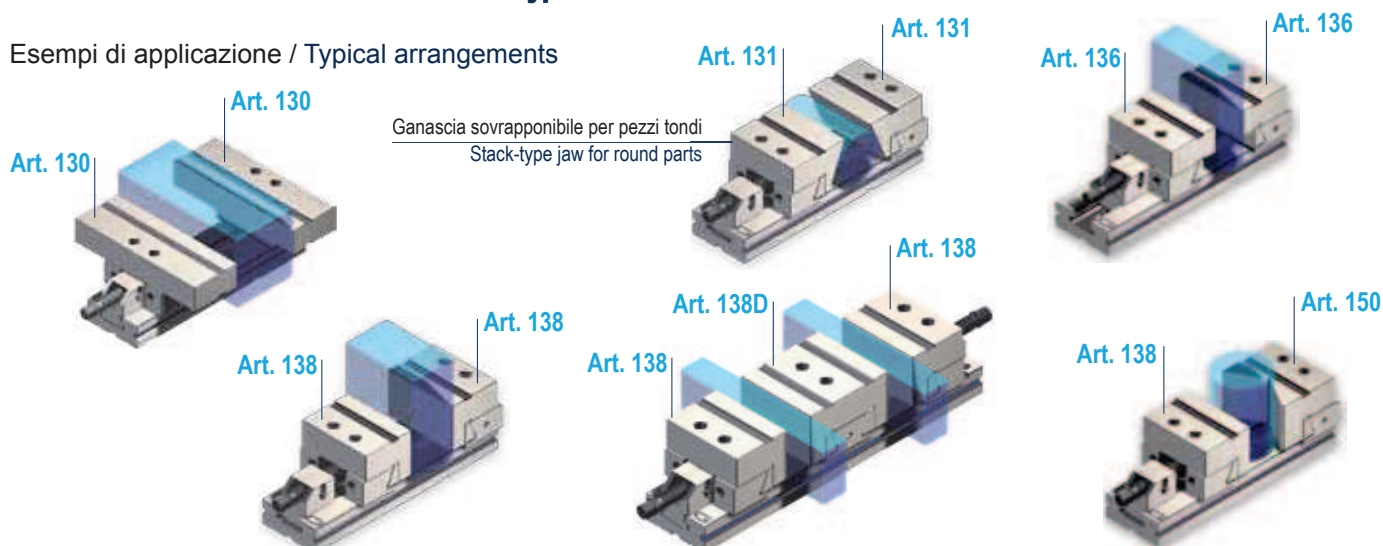
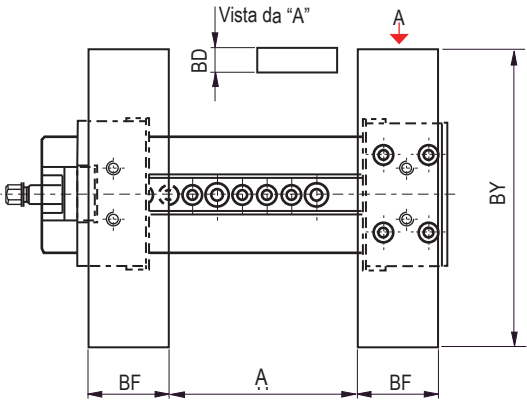
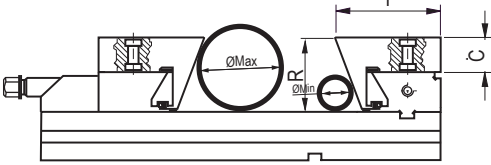
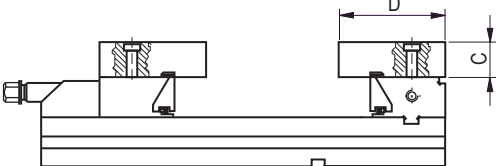
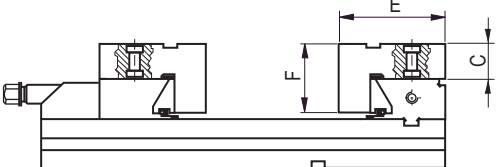

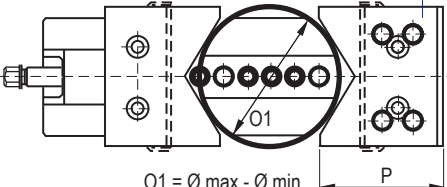


Tipo (grandezza) morsa / Vise (type) size		1	2	3	4	5	6	
Ganascia piana sovrapponibile fissa o mobile Straight stack-type jaw fixed or movable		Cod. Art. 130	2.13.01000	2.13.02000	2.13.03000	2.13.04000	2.13.05000	2.13.06000
		Cod. Art. 130S	2.13.0S100	2.13.0S200	2.13.0S300	2.13.0S400	2.13.0S500	2.13.0S600
		Cad / Each						
Ganascia sovrapponibile per pezzi tondi fissa o mobile Stack-type jaw round parts fixed or movable		Cod. Art. 131	2.13.11000	2.13.12000	2.13.13000	2.13.14000	2.13.15000	2.13.16000
		Cod. Art. 131A	2.13.1A100	2.13.1A200	2.13.1A300	2.13.1A400	2.13.1A500	2.13.1A600
		Cod. Art. 131S	2.13.1S100	2.13.1S200	2.13.1S300	2.13.1S400	2.13.1S500	2.13.1S600
Art. 131 (131S) Larghezza normale / Normal width		Cod. Art. 131AS	2.13.1AS10	2.13.1AS20	2.13.1AS30	2.13.1AS40	2.13.1AS50	2.13.1AS60
Art. 131A (131AS) Larghezza super ridotta / Super narrow width		Cad / Each						
Ganascia piana sovrapponibile fissa o mobile Straight stack-type jaw fixed or movable		Cod. Art. 136	2.13.61000	2.13.62000	2.13.63000	2.13.64000	2.13.65000	2.13.66000
		Cod. Art. 137	2.13.71000	2.13.72000	2.13.73000	2.13.74000	2.13.75000	2.13.76000
		Cod. Art. 136S	2.13.6S100	2.13.6S200	2.13.6S300	2.13.6S400	2.13.6S500	2.13.6S600
Art. 136 (136S) Larghezza normale / Normal width		Cod. Art. 137S	2.13.7S100	2.13.7S200	2.13.7S300	2.13.7S400	2.13.7S500	2.13.7S600
Art. 137 (137S) Larghezza super ridotta / Super narrow width		Cad / Each						
Ganascia a squadra sovrapponibile fissa o mobile Square stack-type jaw fixed or movable		Cod. Art. 138	2.13.81000	2.13.82000	2.13.83000	2.13.84000	2.13.85000	2.13.86000
		Cod. Art. 139	2.13.91000	2.13.92000	2.13.93000	2.13.94000	2.13.95000	2.13.96000
		Cod. Art. 138S	2.13.8S100	2.13.8S200	2.13.8S300	2.13.8S400	2.13.8S500	2.13.8S600
Art. 138 (138S) Larghezza normale / Normal width		Cod. Art. 139S	2.13.9S100	2.13.9S200	2.13.9S300	2.13.9S400	2.13.9S500	2.13.9S600
Art. 139 (139S) Larghezza super ridotta / Super narrow width		Cad / Each						
Ganascia a squadra sovrapponibile doppia Double square jaw stack-type		Cod. Art. 138D	2.13.8D100	2.13.8D200	2.13.8D300	2.13.8D400	2.13.8D500	2.13.8D600
		Cod. Art. 139D	2.13.9D100	2.13.9D200	2.13.9D300	2.13.9D400	2.13.9D500	2.13.9D600
		Cod. Art. 138DS	2.13.8DS10	2.13.8DS20	2.13.8DS30	2.13.8DS40	2.13.8DS50	2.13.8DS60
Art. 138D (138DS) Larghezza normale / Normal width		Cod. Art. 139DS	2.13.9DS10	2.13.9DS20	2.13.9DS30	2.13.9DS40	2.13.9DS50	2.13.9DS60
Art. 139D (139DS) Larghezza super ridotta / Super narrow width		Cad / Each						
Ganascia prismatica sovrapponibile fissa o mobile Stack-type prismatic jaw fixed or movable		Cod. Art. 150	1.15.01000	1.15.02000	1.15.03000	1.15.04000	1.15.05000	1.15.06000
		Cod. Art. 150A	1.15.0A100	1.15.0A200	1.15.0A300	1.15.0A400	1.15.0A500	1.15.0A600
		Cod. Art. 150S	1.15.0S100	1.15.0S200	1.15.0S300	1.15.0S400	1.15.0S500	1.15.0S600
Art. 150 (150S) Larghezza normale / Normal width		Cod. Art. 150AS	1.15.0AS10	1.15.0AS20	1.15.0AS30	1.15.0AS40	1.15.0AS50	1.15.0AS60
Art. 150A (150AS) Larghezza super ridotta / Super narrow width		Cad / Each						

Versione "S" in acciaio lavorabile / "S" type in soft steel
Esempi di applicazione / Typical arrangements


Tipo (grandezza) morsa / Vise (type) size	mm	1	2	3	4	5	6
Art. 130 Temprate o in acciaio lavorabile / Hardened or soft							
	C	32	42	52	62	67	82
	D	84	84	105	130	130	150
	E	80	88	105	110	130	135
	F	57	70	90	110	128	150
	G	110	110	140	171	192,8	190
	I	95	95	123	136	170	206
Art. 131 / 131A Temprate o in acciaio lavorabile / Hardened or soft							
	BD	32	42	52	62	72	82
	BF	80	80	105	120	128	135
	BY	200	250	300	350	400	600
	P	84	120	120	140	175	206
Art. 136 / 137 Temprate o in acciaio lavorabile / Hardened or soft							
	R	60	78	90	110	128	150
	O1 min	26	32	38	45	55	75
	O1 max	160	200	240	280	360	500
Art. 138 / 139 Temprate o in acciaio lavorabile / Hardened or soft							
	W	96	121	146	171	196	296
	Q	30	30	30	30	30	30
	O2 min	33	43	49	60	70	
Art. 138D / 139D Temprate o in acciaio lavorabile / Hardened or soft							
	O2 max	75	100	130	160	180	220
Art. 150 / 150A Temprate o in acciaio lavorabile / Hardened or soft							
							
 $O1 = \varnothing \text{ max} - \varnothing \text{ min}$	Art. 150						