

## Parti di ricambio per CILINDRI IDRAULICI / Spare part for HYDRAULIC CYLINDER

|                                                                 | T1 | T2 - T3 - T4 | T5 | T6 |
|-----------------------------------------------------------------|----|--------------|----|----|
| Cilindro diametro esterno (mm) / Cylinder outside diameter (mm) | 30 | 40           | 50 | 70 |

### Art. 285

Cilindro idraulico a semplice effetto  
Single acting hydraulic cylinder



| Art. 285A | Cilindro / Cylinder               | Cod. | 4.28.5A100 | 4.28.5A300 | 4.28.5A500 | 4.28.5A600   |
|-----------|-----------------------------------|------|------------|------------|------------|--------------|
| Art. 285B | Guarnizione pistone / Piston seal | Cod. | 4.28.5B100 | 4.28.5B300 | 4.28.5B500 | 4.28.5B600   |
| Art. 285C | Pistone / Piston                  | Cod. | 4.28.5C100 | 4.28.5C300 | 4.28.5C500 | 4.28.5C600   |
| Art. 285D | Molla / Spring                    | Cod. | 4.28.5D100 | 4.28.5D300 | 4.28.5D500 | 4.28.5D600   |
| Art. 285E | Bussola / Bushing                 | Cod. | 4.28.5E100 | 4.28.5E300 | 4.28.5E500 | 4.28.5EEE600 |
| Art. 285F | Ghiera / Blocking nut             | Cod. | 4.28.5F100 | 4.28.5F300 | 4.28.5F500 | 4.28.5F600   |
| Art. 285G | Guarnizione / Seal                | Cod. | 4.28.5G100 | 4.28.5G300 | 4.28.5G500 | 4.28.5G600   |
| Art. 285H | Anello guida / Guiding ring       | Cod. | 4.28.5H100 | 4.28.5H300 | 4.28.5H500 | 4.28.5H600   |

Diametro filettato cilindro / Cylinder O.D.

|  |    |    |    |    |
|--|----|----|----|----|
|  | 30 | 40 | 50 | 70 |
|--|----|----|----|----|

Corsa / Stroke

|  |    |    |    |    |
|--|----|----|----|----|
|  | 30 | 40 | 40 | 40 |
|--|----|----|----|----|

Area effettiva del cilindro / Cylinder effective area

|  |   |   |     |      |
|--|---|---|-----|------|
|  | 3 | 7 | 9,6 | 19,6 |
|--|---|---|-----|------|

Pressione max. d'esercizio / Max operating pressure: **bar (1 bar = 14,5 psi)**

|  |  |  |     |  |
|--|--|--|-----|--|
|  |  |  | 450 |  |
|--|--|--|-----|--|


Pressione max. d'esercizio / Max operating pressure: **psi (1 psi = 0,069 bar)**

|  |  |  |      |  |
|--|--|--|------|--|
|  |  |  | 6525 |  |
|--|--|--|------|--|

|                                                                 | T1 | T2 - T3 - T4 | T5 | T6 |
|-----------------------------------------------------------------|----|--------------|----|----|
| Cilindro diametro esterno (mm) / Cylinder outside diameter (mm) | 30 | 40           | 50 | 70 |

### Art. 569

Cilindro idraulico a doppio effetto  
Double acting hydraulic cylinder

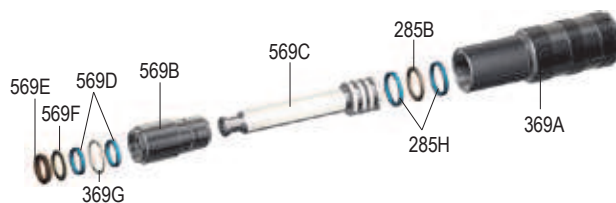

| Art. 569A | Cilindro / Cylinder                    | Cod. | 4.56.9A100 | 4.56.9A300 | 4.56.9A500 | 4.56.9A600 |
|-----------|----------------------------------------|------|------------|------------|------------|------------|
| Art. 285B | Guarnizione pistone / Piston seal      | Cod. | 4.28.5B100 | 4.28.5B300 | 4.28.5B500 | 4.28.5B600 |
| Art. 569B | Prolunga cilindro / Cylinder extension | Cod. | 4.56.9B100 | 4.56.9B300 | 4.56.9B500 | 4.56.9B600 |
| Art. 569C | Pistone / Piston                       | Cod. | 4.56.9C100 | 4.56.9C300 | 4.56.9C500 | 4.56.9C600 |
| Art. 569D | Anello guida / Guiding ring            | Cod. | 4.56.9D100 | 4.56.9D300 | 4.56.9D500 | 4.56.9D600 |
| Art. 569E | Raschiatore / Scraping seal            | Cod. | 4.56.9E100 | 4.56.9E300 | 4.56.9E500 | 4.56.9E600 |
| Art. 569F | Guarnizione cilindro / Cylinder seal   | Cod. | 4.56.9F100 | 4.56.9F300 | 4.56.9F500 | 4.56.9F600 |
| Art. 569G | Guarnizione / Seal                     | Cod. | 4.56.9G100 | 4.56.9G300 | 4.56.9G500 | 4.56.9G600 |
| Art. 285H | Anello guida / Guiding ring            | Cod. | 4.28.5H100 | 4.28.5H300 | 4.28.5H500 | 4.28.5H600 |

Diametro filettato cilindro / Cylinder O.D.

|  |    |    |    |    |
|--|----|----|----|----|
|  | 30 | 40 | 50 | 70 |
|--|----|----|----|----|

Corsa / Stroke

|  |    |    |    |    |
|--|----|----|----|----|
|  | 20 | 33 | 40 | 40 |
|--|----|----|----|----|

Area effettiva del cilindro / Cylinder effective area

|  |   |   |     |      |
|--|---|---|-----|------|
|  | 3 | 7 | 9,6 | 19,6 |
|--|---|---|-----|------|

Pressione max. d'esercizio / Max operating pressure: **bar (1 bar = 14,5 psi)**

|  |  |  |     |  |
|--|--|--|-----|--|
|  |  |  | 450 |  |
|--|--|--|-----|--|

Pressione max. d'esercizio / Max operating pressure: **psi (1 psi = 0,069 bar)**

|  |  |  |      |  |
|--|--|--|------|--|
|  |  |  | 6525 |  |
|--|--|--|------|--|