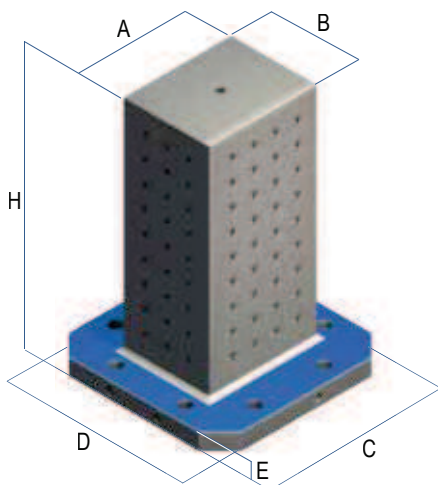



## CUBI RETTANGOLARI

## RECTANGULAR CUBES

## Art. 54E

Reticolo integrale  
Grid cube

## Art. 54F

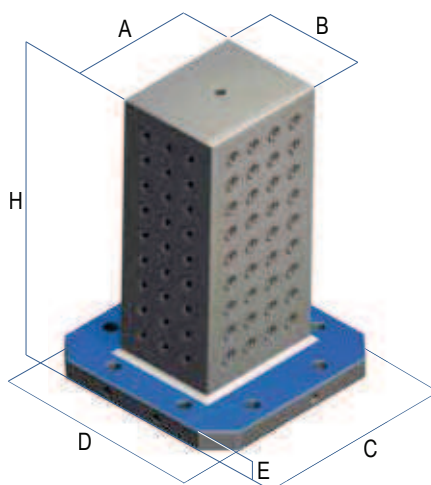Reticolo con bussole  
Grid cube  
with bushing

Stesse dimensioni dell'Art. 54C / Same dimensions of Art. 54C  
 Peso: -5% circa rispetto Art. 54C / Weight: About -5% of Art. 54C

Art. 54E 40		Art. 54E 50		Art. 54F 40		Art. 54F 50	
Cod.		Cod.		Cod.		Cod.	
8.54.E40010		8.54.E00010		8.54.F40010		8.54.F00010	
8.54.E40040		8.54.E00040		8.54.F40040		8.54.F00040	
8.54.E40070		8.54.E00070		8.54.F40070		8.54.F00070	
8.54.E40080		8.54.E00080		8.54.F40080		8.54.F00080	
8.54.E40100		8.54.E00100		8.54.F40100		8.54.F00100	
8.54.E40110		8.54.E00110		8.54.F40110		8.54.F00110	
8.54.E40120		8.54.E00120		8.54.F40120		8.54.F00120	

## Specifiche Specifications

## Art. 54A

Fusione in ghisa G30 monoblocco sgrassata con doppio trattamento di distensione.  
 Pareti con spessore 43-45 mm  
 (Sovrametallo 10 mm)

One integral G30 cast iron casting rough milled with double stress relieving heat treatment.  
 Wall thickness 43-45 mm  
 (10 mm stock)

## Art. 54B

Fusione sgrassata con base lavorata e raschiata per pallet a norme Europee o Giapponesi.

Vedi specifiche a pag. 8.4

Rough milled casting with base face machined and hand scraped for direct clamping on European or Japanese standard pallet.

See specifications pag. 8.4

## Art. 54C

Cubo rettangolare completamente finito con pareti spessore 38-40 mm circa.

Rectangular cube completely finished with wall thickness roughly 38-40 mm

## Art. 54E 40 / 50

Cubo rettangolare a reticolo con fori calibrati e filettati integrali - Tolleranza  $\pm 0,02$  mm

- Interasse reticolo 40 mm =  $\varnothing 12$  / M10
- Interasse reticolo 50 mm =  $\varnothing 16$  / M12

Grid rectangular cube with calibrated holes and solid threads - Tolerance  $\pm 0,02$  mm

- Grid pitch 40 mm =  $\varnothing 12$  / M10
- Grid pitch 50 mm =  $\varnothing 16$  / M12

## Art. 54F 40 / 50

Cubo rettangolare a reticolo con bussole temprate 100Cr6 e filetti riportati in acciaio inox  
 Tolleranza  $\pm 0,02$  mm

- Interasse reticolo 40 mm =  $\varnothing 12$  / M10
- Interasse reticolo 50 mm =  $\varnothing 16$  / M12

Grid rectangular cube with hardened bushing 100Cr6 and stainless steel helicoils  
 Tolleranza  $\pm 0,02$  mm

- Grid pitch 40 mm =  $\varnothing 12$  / M10
- Grid pitch 50 mm =  $\varnothing 16$  / M12

! For different finishing and materials (aluminium), ask for specific quotation