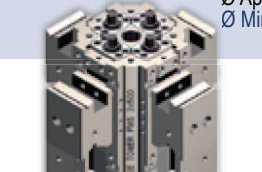


| Tipo (grandezza) morsa / Vise (type) size | | 1 25 kN | | 2 25 kN | | | | 3 30 kN | | |
|-----------------------------------------------------------------------------------|---------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
|  | Apertura massima / Max. opening | A | 2 x 60 | 2 x 110 | 2 x 118 | 2 x 168 | 2 x 218 | 2 x 268 | 2 x 162 | 2 x 212 |
| | Cod. | | 5.86.3C120 | 5.86.3C130 | 5.86.3C230 | 5.86.3C240 | 5.86.3C250 | 5.86.3C260 | 5.86.3C340 | 5.86.3C350 |
| Art. 863C Cubo morsa doppia Vise tower doublestation | | | | | | | | | | |

| Ø Apertura Minima - Massima Ø Minimum - Max. opening | | 10 / 25 | | 10 / 50 | | | | 25 / 100 | | |
|-----------------------------------------------------------------------------------|---------------------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|  | Apertura Minima - Massima | A | 10 / 25 | 10 / 50 | | | | 25 / 100 | | |
| | Cod. | | 5.870.0C120 | 5.870.0C130 | 5.870.0C230 | 5.870.0C240 | 5.870.0C250 | 5.870.0C260 | 5.870.0C340 | 5.870.0C350 |
| Art. 870C Cubo morsa autocentrante Self-centering vise tower | | | | | | | | | | |

| | | | | | | | | |
|----|-----|-----|-----|-----|-----|-----|-----|-----|
| D | 200 | 300 | 300 | 400 | 500 | 600 | 400 | 500 |
| E | 232 | 332 | 320 | 420 | 520 | 620 | 425 | 525 |
| G1 | 120 | | | 175 | | | 210 | |
| L | 300 | | | 350 | | | 400 | |
| M | 33 | | | 33 | | | 38 | |
| W | 74 | | | 94 | | | 124 | |
| W1 | 60 | | | 75 | | | 100 | |
| kg | 42 | 63 | 68 | 90 | 113 | 130 | 118 | 147 |

Dotazione standard per Art. 863C e Art. 870C:



- 1 chiave a pipa Art. 375
- 4 arresti laterali Art. 370
- 2 coppie di tasselli di posizionamento precisi Art. 297
- 1 golfare di sollevamento Art. 848
- Imballo in cassetta di legno
- Meccanismo 3^a mano

Standard equipment for Art. 863C and Art. 870C:

- 1 box wrench Art. 375
- 4 workstops Art. 370
- 2 pair of precision positioning key-nuts Art. 297
- 1 lifting hook Art. 848
- Packaging wooden box
- Third hand device

Art. 863C

Cubo morsa FMS doppio con ganasce a gradino per il serraggio di 8 pezzi / Double FMS vise tower with step-type jaws for 8 clamping stations

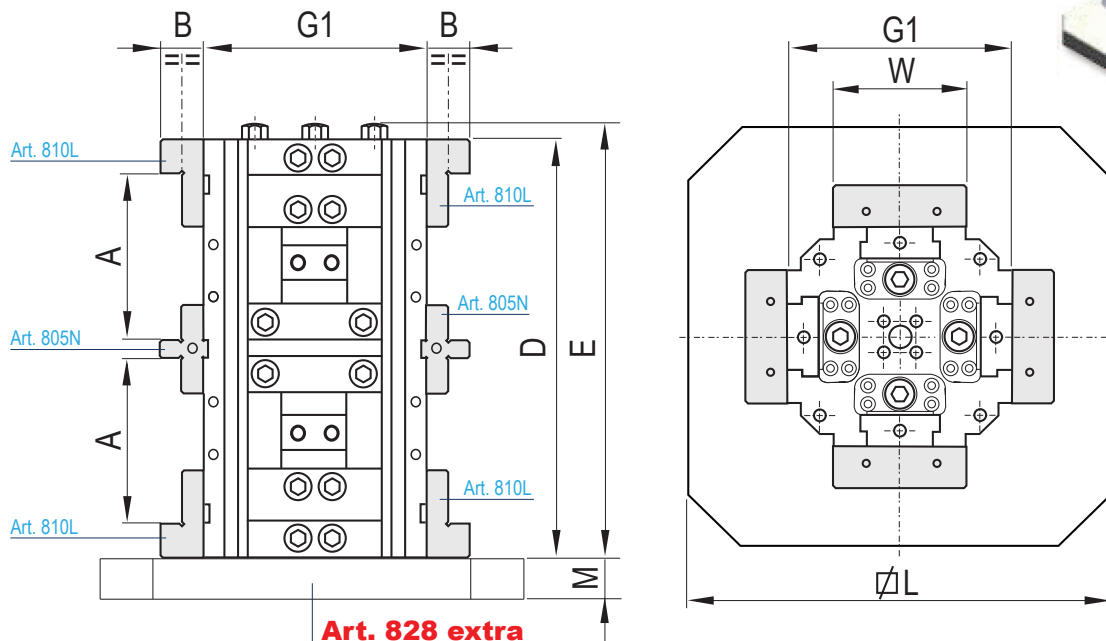

| 3 30 kN | | | 4 30 kN | | | | 5 32 kN | | | 6 32 kN | | |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 2 x 262 | 2 x 312 | 2 x 362 | 2 x 204 | 2 x 254 | 2 x 304 | 2 x 354 | 2 x 254 | 2 x 304 | 2 x 354 | 2 x 354 | 2 x 404 | 2 x 454 |
| 5.86.3C360 | 5.86.3C370 | 5.86.3C380 | 5.86.3C450 | 5.86.3C460 | 5.86.3C470 | 5.86.3C480 | 5.86.3C560 | 5.86.3C570 | 5.86.3C580 | 5.86.3C680 | 5.86.3C690 | 5.86.3C610 |

| 25 / 100 | | | 30 / 150 | | | | 35 / 200 | | | 40 / 300 | | |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 5.87.0C360 | 5.87.0C370 | 5.87.0C380 | 5.87.0C450 | 5.87.0C460 | 5.87.0C470 | 5.87.0C480 | 5.87.0C560 | 5.87.0C570 | 5.87.0C580 | 5.87.0C680 | 5.87.0C690 | 5.87.0C610 |

| | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| 600 | 700 | 800 | 500 | 600 | 700 | 800 | 600 | 700 | 800 | 800 | 900 | 1000 |
| 625 | 725 | 825 | 525 | 625 | 725 | 825 | 625 | 725 | 825 | 825 | 925 | 1025 |
| 210 | | 245 | | | | | 280 | | | 290 | | |
| 400 | | 450 | | | | | 500 | | | 550 | | |
| 38 | | 38 | | | | | 38 | | | 38 | | |
| 124 | | 144 | | | | | 169 | | | 189 | | |
| 100 | | 132 | | | | | 140 | | | 160 | | |
| 177 | 206 | 236 | 242 | 290 | 339 | 388 | 328 | 383 | 437 | 656 | 738 | 820 |

Art. 870C

Cubo morsa FMS autocentrante con ganasce prismatiche / Self-centering FMS vise tower with prismatic jaws

