




1326 DIGI-MET® Pocket calipers IP67 with data output



1326 516

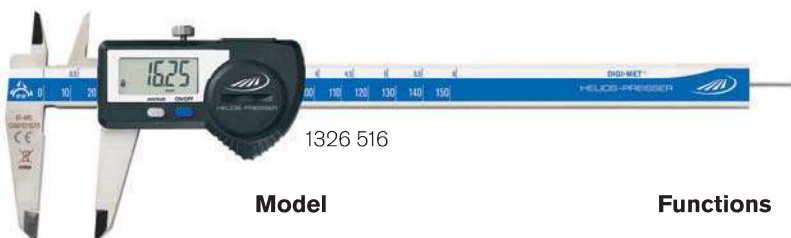

Model

- Measuring system is insensitive to fluids and cooling agents
- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Variable data output RS 232 + Digimatic + USB

Delivery

- Plastic case

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm	mm		EUR
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 516	158.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rect.	1326 517	158.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rect.	1326 518	231.00



1998720

1997501

1998501

Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.70
Data cable DATA VARIABLE to RS232	1997 501	48.00
Data cable DATA VARIABLE to digimatic	1998 501	61.00
Data cable DATA VARIABLE to USB	1998 720	69.00

1322 DIGI-MET® Pocket caliper PRISMA



Model


- Double prisma guide with excellent sliding characteristics
- Protection class IP67
- Stainless steel
- DIN 862
- LCD display 7.5 mm
- Locking screw
- Inside cross points
- Four way measurement

Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Quick-Start**
- Quick-Lock** (key lock)
- Variable data output RS 232 + Digimatic + USB

Delivery

- Wooden case



	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm	mm		EUR
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1322 516	203.00



= QuickLock



= QuickStart



= Waterproof acc. IP



= Data output



= DIN