





1348 DIGI-MET® Universal calipers

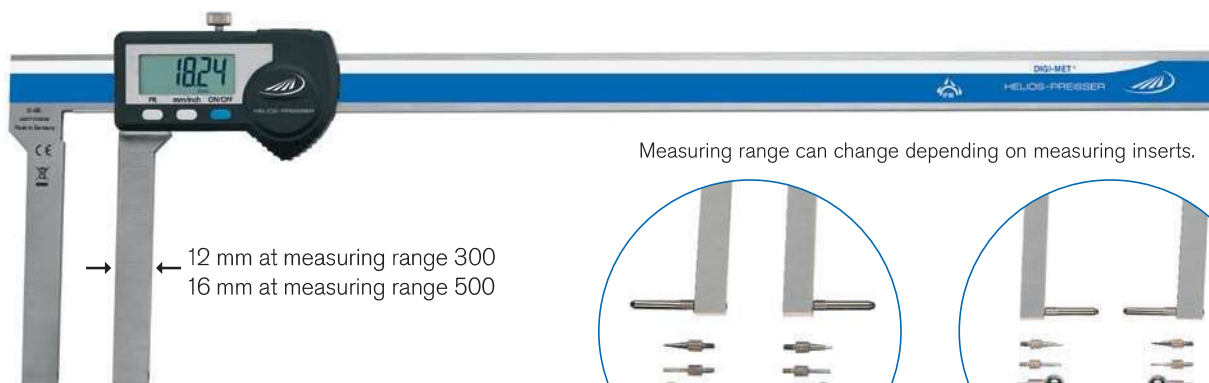


Measuring range can change depending on measuring inserts.

→ 12 mm at measuring range 300
← 16 mm at measuring range 500



for internal measurements



for external measurements

Model

- Stainless steel
- Factory standard
- LCD display 10 or 12.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic tasks through measuring inserts with thread M 2.5

Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

Delivery

- Wooden box
- Without measuring inserts
(correct measuring inserts with thread M 2.5 see pages 137 - 140)

	Measuring range		Jaw length		Reading		Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm		EUR
	0 - 300	0 - 12	90	3.5	0.01	.0005	0.06	1348 722	583.00
	0 - 500	0 - 20	100	4.0	0.01	.0005	0.06	1348 728	747.00



1998720

1998501

1997501

Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.70
Data cable DATA VARIABLE to RS232	1997 501	48.00
Data cable DATA VARIABLE to digimatic	1998 501	61.00
Data cable DATA VARIABLE to USB	1998 720	69.00