



DIGITAL CALIPER



fraction reading


1102-150

- Resolution: 0.01mm, 0.0005", 1/128"
- Buttons: unit (mm/in/fraction), ABS, on/off, zero
- Absolute and incremental measurement
- Battery CR2032, automatic power off
- Data output
- Meet DIN862
- Made of stainless steel

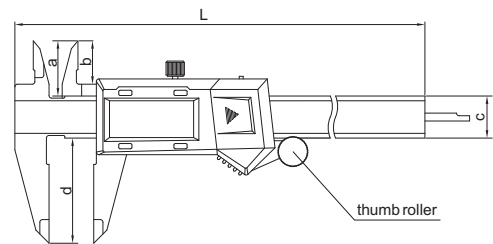

(mm)


Code	Range	Accuracy	Thumbroller	L	a	b	c	d
1102-150	0-150mm/0-6"	±0.03mm	with	234	21	16.5	16	40
1102-200	0-200mm/0-8"	±0.03mm	with	286	24	19	16	50
1102-300	0-300mm/0-12"	±0.03mm	with	390	26	21.5	16	60
1102-150W	0-150mm/0-6"	±0.03mm	without	234	21	16.5	16	40
1102-200W	0-200mm/0-8"	±0.03mm	without	286	24	19	16	50
1102-300W	0-300mm/0-12"	±0.03mm	without	390	26	21.5	16	60

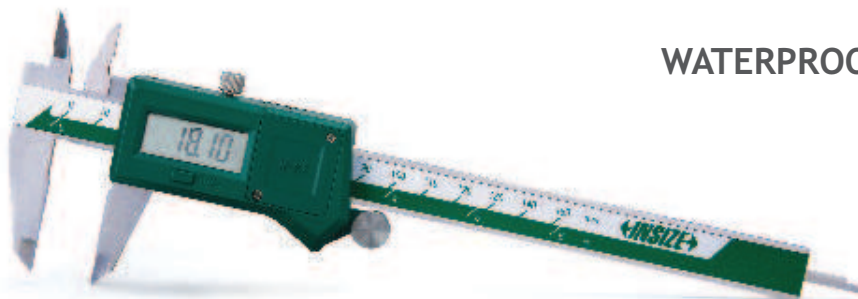

WATERPROOF DIGITAL CALIPER

1118-150

- IP67 dust/waterproof
- Resolution: 0.01mm/0.0005"
- Button function: zero, on/off, mm/inch
- Battery CR2032, automatic power off
- Meet DIN862
- Made of stainless steel

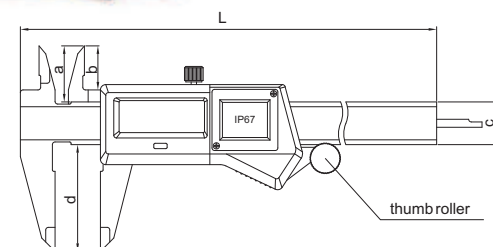

(mm)

Code	Range	Accuracy	Thumbroller	L	a	b	c	d
1118-150	0-150mm/0-6"	±0.03mm	with	236	21	16	16	40
1118-200	0-200mm/0-8"	±0.03mm	with	286	24	19	16	50
1118-300	0-300mm/0-12"	±0.03mm	with	400	25	20.5	17	60
1118-150W	0-150mm/0-6"	±0.03mm	without	236	21	16	16	40
1118-200W	0-200mm/0-8"	±0.03mm	without	286	24	19	16	50
1118-300W	0-300mm/0-12"	±0.03mm	without	400	25	20.5	17	60