Resolution: 0.01mm/0.0005"

- Buttons: zero, mm/inch, on/off
- Automatic power off, move the digital unit to turn on power
- Battery LR44
- Meet DIN862
- Made of stainless steel






DATA OUTPUT

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
 Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)


								(mm)
Code		Accuracy						
1171-200	0-200mm/0-8"	±0.03mm	12	38	17	60	10	320
1171-306	0-300mm/0-12"	±0.04mm	12	38	17	60	10	420
1171-300	0-300mm/0-12"	±0.04mm	12	38	17	90	10	420

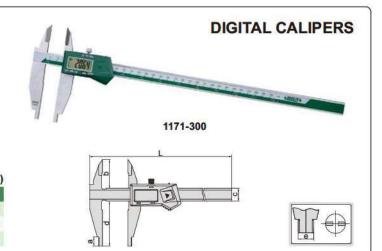

DATA

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

							(mm)	
Code	Range	Accuracy						
1170-200	0-200mm/0-8"	±0.03mm	12	17	60	10	320	
1170-306	0-300mm/0-12"	±0.04mm	12	17	60	10	420	
1170-300	0-300mm/0-12"	±0.04mm	12	17	90	10	420	

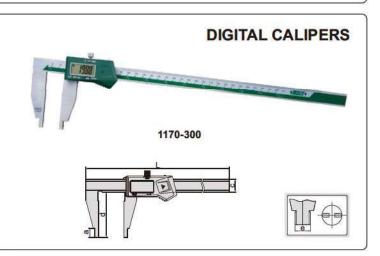

■ Made of hard plastic, non-magnetic and non-conductive

- Prevent workpieces from
- scratching by calipers

 Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch
- Battery CR2032, automatic power off

Code	Range	Accuracy
1139-150	0-150mm/0-6"	±0.1mm

