

DIGITAL CALIPER WITH INTERCHANGEABLE POINTS CODE 1124-300A

DATA
OUTPUT



short spherical/flat points (included) Unit: mm




long spherical/flat points (included) Unit: mm



short spherical blade points (included) Unit: mm




long spherical blade points (included) Unit: mm



- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143), data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)




1124-300A

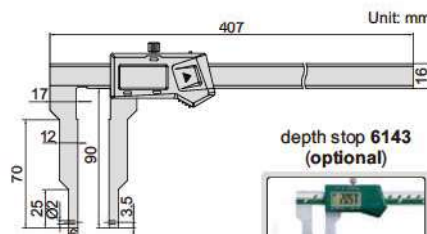

depth stop 6143
(optional)









install points



preset buttons



measure internal and
external grooves



zero setting block for
external measurement
(included)



Point	Range	Accuracy	Application
short spherical/ flat points	24-324mm/1-12.7"(internal) 0-288mm/0-11.3"(external)	±0.04mm	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/ flat points	40-340mm/1.5-13.3"(internal) 0-272mm/0-10.7"(external)	±0.04mm	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	24-324mm/1-12.7"(internal) 0-288mm/0-11.3"(external)	±0.04mm	for narrow grooves inside hole (small hole)
long spherical blade points	40-340mm/1.5-13.3"(internal) 0-272mm/0-10.7"(external)	±0.04mm	for narrow grooves inside hole (large hole)

Multifunctional points 7392
(optional, refer to 1526-200 for more details)



Ball points 7391
(optional, refer to 1526-200 for more details)



Screw thread points 7381, 7321
(optional, refer to 1526-200 for more details)



DIGITAL INSIDE GROOVE CALIPERS

DATA
OUTPUT





- Measure groove diameter
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

preset buttons



1120-150A

depth stop 6143
(optional)



Code	Range	Accuracy	L	a	b	c	d	e
1120-150A	22-150mm	±0.04mm	250	5	11	16	30	1
1120-200A	25-200mm	±0.04mm	310	5	12.5	16	40	1
1120-300A	30-300mm	±0.05mm	410	5	15	17	50	1.5