

DATA
OUTPUT



DIGITAL INSIDE POINT CALIPERS

- Measure groove diameter
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

depth stop 6143 (optional)





1121-150A

Code	Range	Accuracy	L	a	b	c	d	D
1121-150A	24-150mm	±0.04mm	250	5	12	16	30	Ø2
1121-200A	25-200mm	±0.04mm	310	5	12.5	16	40	Ø2
1121-3001A	50-300mm	±0.06mm	410	8	25	17	80	Ø3

(mm)

preset buttons




DATA
OUTPUT

DIGITAL INSIDE GROOVE CALIPER

preset buttons



depth stop 6143 (optional)

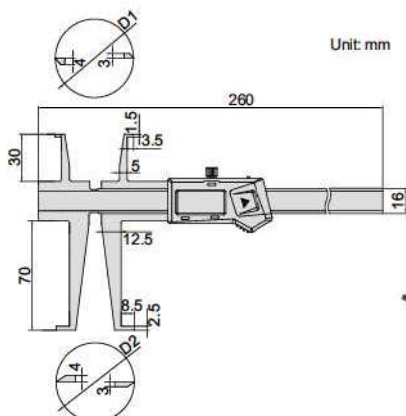

Unit: mm

- Measure diameter of grooves inside bores
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)




1176-150




Code	Range of upper jaw	Range of lower jaw	Accuracy
1176-150	9-150mm/0.35-6"	15-150mm/0.59-6"	±0.04mm

sizes to be measured
(use upper jaws)



D1	L1
Ø9	<8
Ø10	<15
Ø11~150	<30

sizes to be measured
(use lower jaws)




D2	L2	D2	L2
Ø15	<10	Ø19	<42
Ø16	<18	Ø20	<50
Ø17	<26	Ø21	<58
Ø18	<34	Ø22~150	<70

DATA
OUTPUT

DIGITAL INSIDE GROOVE CALIPER

- Measure diameter of grooves inside bores
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: depth stop (code 6143), data output cable (code 7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

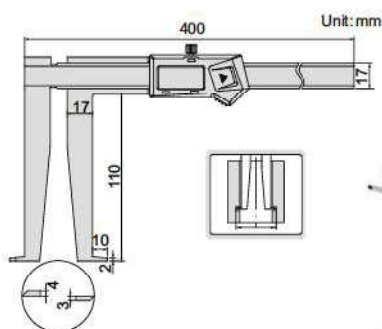

Unit: mm



1178-300



Code	Range	Accuracy
1178-300	25-300mm/1.18-12"	±0.05mm


preset buttons



depth stop 6143 (optional)



sizes to be measured



D1	L1
Ø25	<50
Ø26	<60
Ø27~300	<110