DIGITAL CALIPER WITH INTERCHANGEABLE POINTS CODE 1526-200

short spherical points (included)

long spherical/flat points (included)



spherical blade points (included)



VIDEO

DATA OUTPUT

1526-200

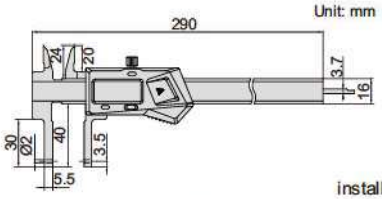

- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Data output
- Made of stainless steel
- Optional accessory: points (code **1526-T101**, **7392**, **7391**, **7381**, **7321**), depth stop (code **6143**), data output cable (code **7306-20**, **7302-SPC5A/SPC5B**, **7305-SPC2A**)

preset buttons

install points



measure internal and external grooves

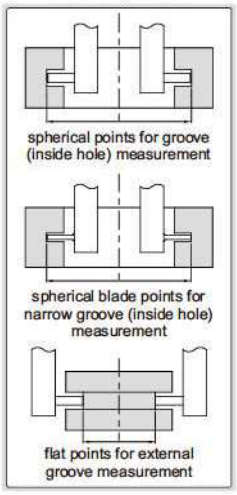

Point	Range	Accuracy	Application
short spherical points	12-212mm/0.5-8.5"(internal)	±0.03mm	for grooves inside small hole
long spherical/flat points	24-224mm/1-8.8"(internal) 0-187mm/0-7.5"(external)	±0.03mm	spherical points for grooves inside hole flat points for external grooves
spherical blade points	24-224mm/1-8.8"(internal) 0-187mm/0-7.5"(external)	±0.03mm	for narrow grooves inside hole

zero setting block for external measurement (included)

Depth stop (optional)

6143





Code
6143

Multifunctional points (optional)

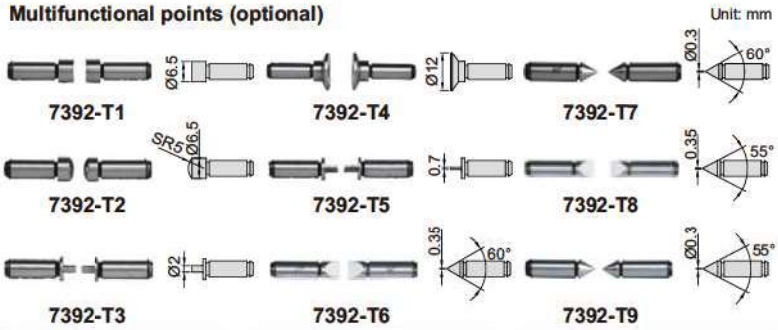

Code	Type	Code	Type	Code	Type
7392-T1*	flat	**7392-T4***	disk	**7392-T7***	point
7392-T2*	spherical	**7392-T5***	blade	**7392-T8***	knife-edge
7392-T3*	spline	**7392-T6***	knife-edge	**7392-T9***	point

*It is necessary to use point sleeve (code **1526-T101**) for these points

Point sleeve (optional)

1526-T101



installation



Code
1526-T101

Screw thread points (optional)

7321-T16



7381-T11

Ball points (optional)

7391-T5



Code	Ball dia.(D)	Module
7391-T3*	SØ2.0mm	1.25
7391-T4*	SØ2.5mm	1.5
7391-T5*	SØ3.0mm	1.75
7391-T6*	SØ3.5mm	2
7391-T7*	SØ4.0mm	2.25
7391-T8*	SØ4.5mm	2.5
7391-T9*	SØ5.0mm	2.75
7391-T10*	SØ6.0mm	3.5

Internal thread (60° thread angle)

Code	Pitch
7321-T11*	0.4-0.5mm/64-48TPI
7321-T12*	0.6-0.9mm/44-28TPI
7321-T13*	1-1.75mm/24-14TPI
7321-T14*	2-3mm/13-9TPI
7321-T15*	3.5-5mm/8-5TPI
7321-T16*	5.5-7mm/4.5-3.5TPI
7321-T1S*	6 pairs/set, including all above points

External thread (60° thread angle)

Code	Pitch
7381-T11*	0.4-0.5mm/64-48TPI
7381-T12*	0.6-0.9mm/44-28TPI
7381-T13*	1-1.75mm/24-14TPI
7381-T14*	2-3mm/13-9TPI
7381-T15*	3.5-5mm/8-5TPI
7381-T16*	5.5-7mm/4.5-3.5TPI
7381-TS*	6 pairs/set, including all above points

*It is necessary to use point sleeve (code **1526-T101**) for these points