DIGITAL INDICATORS (STANDARD MODEL)

INSPECTION CERTIFICATE
TRACEABLE TO NIST

DATA OUTPUT

spindle lift knob is included



2112-10
2112-101

2112-10

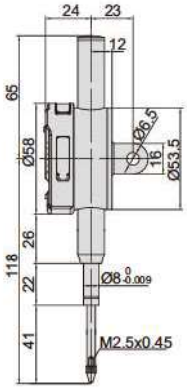

2112-25
2112-251

2112-251

Unit: mm

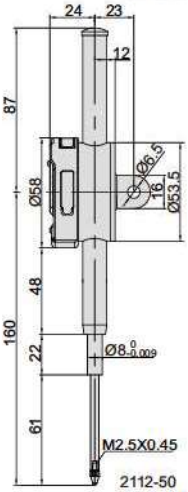

2112-50
2112-501

2112-501

- Button function: on/off, inch/mm, zero
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (code **7306-40, 7302-SPC3A, 7305-SPC1A**), backs (page 104~105), contact points (page 102~103)

Resolution 0.001mm/0.00005"

Code	Range	Accuracy	Hysteresis	Remark
2112-101F*	12.7mm/0.5"	5μm	2μm	flat back
2112-251F*	25.4mm/1"	5μm	3μm	flat back
2112-501F*	50.8mm/2"	6μm	3μm	flat back
2112-101*	12.7mm/0.5"	5μm	2μm	lug back
2112-251*	25.4mm/1"	5μm	3μm	lug back
2112-501*	50.8mm/2"	6μm	3μm	lug back

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis	Remark
2112-10F*	12.7mm/0.5"	20μm	10μm	flat back
2112-25F*	25.4mm/1"	20μm	10μm	flat back
2112-50F*	50.8mm/2"	30μm	10μm	flat back
2112-10*	12.7mm/0.5"	20μm	10μm	lug back
2112-25*	25.4mm/1"	20μm	10μm	lug back
2112-50*	50.8mm/2"	30μm	10μm	lug back

*Supplied with manufacturer inspection certificate traceable to NIST USA

METRIC DIGITAL INDICATORS

INSPECTION CERTIFICATE
TRACEABLE TO NIST

DATA OUTPUT

spindle lift knob is included



2116-10
2116-101

2116-10

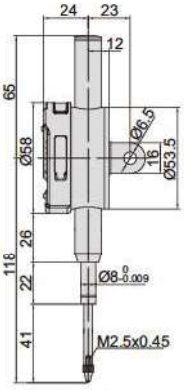

2116-25
2116-251

2116-251

Unit: mm

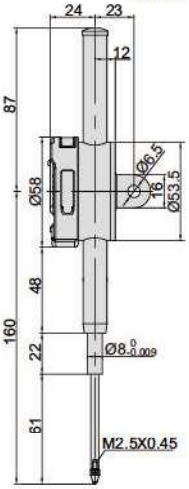

2116-50
2116-501

2116-501

- Button function: on/off, +/-, zero
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (code **7306-40, 7302-SPC3A, 7305-SPC1A**), backs (page 104~105), contact points (page 102~103)

Resolution 0.001mm

Code	Range	Accuracy	Hysteresis	Remark
2116-101F*	12.7mm	5μm	2μm	flat back
2116-251F*	25.4mm	5μm	3μm	flat back
2116-501F*	50.8mm	6μm	3μm	flat back
2116-101*	12.7mm	5μm	2μm	lug back
2116-251*	25.4mm	5μm	3μm	lug back
2116-501*	50.8mm	6μm	3μm	lug back

Resolution 0.01mm

Code	Range	Accuracy	Hysteresis	Remark
2116-10F*	12.7mm	20μm	10μm	flat back
2116-25F*	25.4mm	20μm	10μm	flat back
2116-50F*	50.8mm	30μm	10μm	flat back
2116-10*	12.7mm	20μm	10μm	lug back
2116-25*	25.4mm	20μm	10μm	lug back
2116-50*	50.8mm	30μm	10μm	lug back

*Supplied with manufacturer inspection certificate traceable to NIST USA