WATERPROOF DIGITAL INDICATORS

INSPECTION CERTIFICATE
TRACEABLE TO NIST

WATERPROOF

DATA OUTPUT



2115-10
2115-101

2115-10

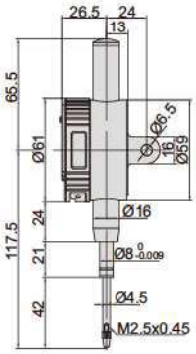

2115-25
2115-251

2115-25

Unit: mm

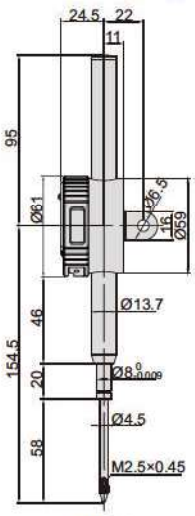

2115-50
2115-501

2115-50

Resolution 0.001mm/0.00005"

Code	Range	Dust/waterproof	Accuracy	Hysteresis	Remark
2115-101*	12.7mm/0.5"	IP65	5μm	2μm	lug back
2115-251*	25.4mm/1"	IP54	5μm	3μm	lug back
2115-501*	50.8mm/2"	IP54	6μm	3μm	lug back
2115-101F*	12.7mm/0.5"	IP65	5μm	2μm	flat back
2115-251F*	25.4mm/1"	IP54	5μm	3μm	flat back
2115-501F*	50.8mm/2"	IP54	6μm	3μm	flat back

Resolution 0.01mm/0.0005"

Code	Range	Dust/waterproof	Accuracy	Hysteresis	Remark
2115-10*	12.7mm/0.5"	IP65	20μm	10μm	lug back
2115-25*	25.4mm/1"	IP54	20μm	10μm	lug back
2115-50*	50.8mm/2"	IP54	30μm	10μm	lug back
2115-10F*	12.7mm/0.5"	IP65	20μm	10μm	flat back
2115-25F*	25.4mm/1"	IP54	20μm	10μm	flat back
2115-50F*	50.8mm/2"	IP54	30μm	10μm	flat back

*Supplied with manufacturer inspection certificate traceable to NIST USA

spindle lift knob is included
(except **2115-101/101F, 2115-10/10F**)

- Dust/waterproof
- Button function: on/off, zero, mm/inch
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (code **7306-40**, **7302-SPC3A**, **7305-SPC1A**), backs (page 104~105), contact points (page 102~103)

DIGITAL INDICATORS FOR BORE GAGES

INSPECTION CERTIFICATE
TRACEABLE TO NIST

DATA OUTPUT

- Specially designed for bore gages
- The minimum value tracking function can find the diameter automatically
- Read the diameter directly, after imputing the size of setting ring
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: minimum value tracking, calibration, data preset, inch/metric conversion, absolute/incremental measurement
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output cable (code **7306-40, 7302-SPC3A, 7305-SPC1A**), backs (page 104~105), contact points (page 102~103)

analog pointer

2108-10F

Unit: mm

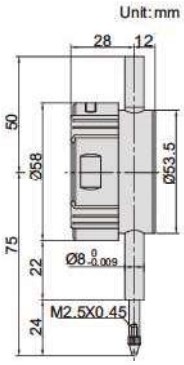

Code	Range	Resolution	Accuracy	Hysteresis	Remark
2108-10F*	12.7mm/0.5"	0.002mm/0.0001"	20μm	10μm	flat back
2108-101F*	12.7mm/0.5"	0.001mm/0.00005"	5μm	2μm	flat back

*Supplied with manufacturer inspection certificate traceable to NIST USA