


## WATERPROOF DIGITAL PROTRACTOR (HEAVY DUTY)



- Suitable for setting horizontal and vertical mitre angles of cutting machine
- Buttons: ON/OFF, HOLD/SUP, SPR/CNR/MTR/BVL
- IP54 dust/waterproof
- With transverse and longitudinal vials
- 2xAAA batteries
- Absolute level, zero setting is not needed when batteries are replaced
- Backlight will turn off in one minute after no data changing, automatic power off in 5 minutes




2174-225

IP54  
WATERPROOF

ABSOLUTE  
LEVEL

AUTOMATIC  
BACKLIGHT

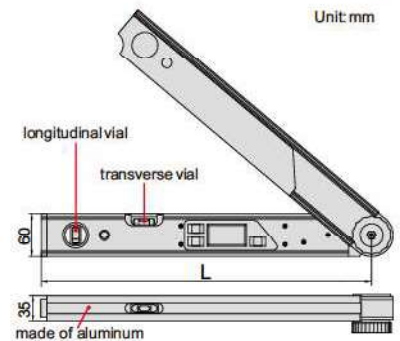


Unit: mm

| Code     | Size (L) | Range  | Resolution | Accuracy |
|----------|----------|--------|------------|----------|
| 2174-225 | 460mm    | 0-225° | 0.05°      | ±0.10°   |



## DIGITAL PROTRACTOR



2171-250




Unit: mm




- Buttons: on/off, hold (keep the reading), zero, ABS (absolute and incremental measurement)
- Fix the locking screw at 4 positions for different measuring ranges: 0°~225°, -225°~0°, -45°~180°, -180°~45°
- Remove the locking screw for 360° range
- With level vial
- Battery CR2032
- Automatic power off

| Code     | Size (L) | Range  | Resolution | Accuracy |
|----------|----------|--------|------------|----------|
| 2171-250 | 250mm    | 0-360° | 0.05°      | ±0.15°   |

## DIGITAL PROTRACTORS

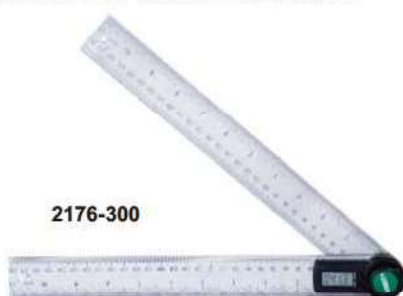


2176-300



Unit: mm

- Buttons: on/off, zero
- With clamping screw to lock the blades
- Graduation of blade: 1mm and 1/32"
- Made of stainless steel
- CR2032 battery
- Automatic power off




| Code     | Size (L) | Range  | Resolution | Accuracy |
|----------|----------|--------|------------|----------|
| 2176-200 | 200mm    | 0-360° | 0.1°       | ±0.3°    |
| 2176-300 | 300mm    | 0-360° | 0.1°       | ±0.3°    |

## PROTRACTOR

- Made of stainless steel
- Satin chrome plated scale
- With clamping screw



4780-85



Unit: mm

| Code    | Size     | Range  | Graduation | Accuracy |
|---------|----------|--------|------------|----------|
| 4780-85 | 85x150mm | 0-180° | 1°         | ±0.3°    |