

## SIDE TYPE DIAL TEST INDICATOR




**INSPECTION  
CERTIFICATE**  
TRACEABLE TO NIST


- Meet DIN2270
- Ceramic bearing
- Anti magnetic carbide contact point
- Two measuring directions
- Supplied with one clamp:  
diameter Ø8mm
- Optional accessory: styli (page 109)



2898-08



ANTI MAGNETIC  
CARBIDE CONTACT POINT



Code	Range	Graduation	Accuracy	Hysteresis	Dial reading
2898-08*	0.8mm	0.01mm	13µm	3µm	0-40-0

\* Supplied with manufacturer inspection certificate traceable to NIST USA

## DIAL TEST INDICATORS


**INSPECTION  
CERTIFICATE**  
TRACEABLE TO NIST

JEWELLED  
BEARING

- Meet DIN2270  
(except 2380-02, 2381-02)
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps:  
diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 109)



2380-08

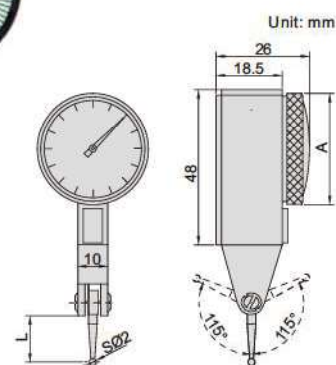

Code	Range	Graduation	Accuracy	Hysteresis	Dial reading	A	L
2380-08*	0.8mm	0.01mm	13µm	3µm	0-40-0	Ø30	13.5
2381-08*	0.8mm	0.01mm	13µm	3µm	0-40-0	Ø37	13.5
2380-02*	0.2mm	0.002mm	6µm	2µm	0-100-0	Ø30	12.5
2381-02*	0.2mm	0.002mm	6µm	2µm	0-100-0	Ø37	12.5


\* Supplied with manufacturer inspection certificate traceable to NIST USA

## BACK PLUNGER TYPE DIAL TEST INDICATOR


**INSPECTION  
CERTIFICATE**  
TRACEABLE TO NIST

JEWELLED  
BEARING

- Meet DIN2270
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps:  
diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 109)



2398-08



Code	Range	Graduation	Accuracy	Hysteresis	Dial reading
2398-08*	0.8mm	0.01mm	13µm	3µm	0-40-0

\* Supplied with manufacturer inspection certificate traceable to NIST USA