

DIAL TEST INDICATOR




2380-08


- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter Ø4mm and Ø8mm
- Optional accessory: styli (page F18)

Code	Range	Graduation	Accuracy(f_{ges})	Hysteresis(f_u)	Dial reading	A	L
2380-08	0.8mm	0.01mm	13 μ m	3 μ m	0-40-0	Ø30mm	16.5mm
2381-08	0.8mm	0.01mm	13 μ m	3 μ m	0-40-0	Ø37.5mm	16.5mm
2380-02	0.2mm	0.002mm	6 μ m	2 μ m	0-100-0	Ø30mm	16mm
2381-02	0.2mm	0.002mm	6 μ m	2 μ m	0-100-0	Ø37.5mm	16mm

Unit: mm

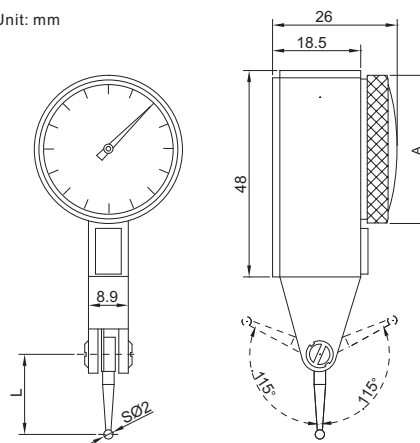

clamps

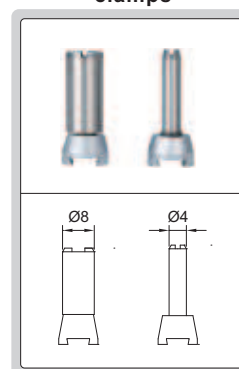

LONG STYLI DIAL TEST INDICATOR




2390-081

- Jeweled bearing
- Ruby contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter Ø4mm and Ø8mm

Code	Range	Graduation	Accuracy(f_{ges})	Hysteresis(f_u)	Dial reading	A
2390-081	0.8mm	0.01mm	13 μ m	5 μ m	0-40-0	Ø31mm
2390-082	0.8mm	0.01mm	13 μ m	5 μ m	0-40-0	Ø38.4mm

Unit: mm

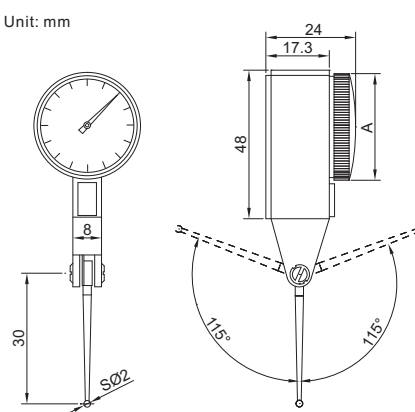

clamps

