

## DIGITAL OUTSIDE MICROMETERS (WITH DATA OUTPUT)

DATA  
OUTPUT

IP65  
WATERPROOF

### Ratchet stop type

| Code       | Range            | Accuracy | L     | a  | b     | c   |
|------------|------------------|----------|-------|----|-------|-----|
| 3101-25A*  | 0-25mm/0-1"      | ±2μm     | 34.5  | 6  | 25    | 3   |
| 3101-50A*  | 25-50mm/1-2"     | ±2μm     | 59.5  | 8  | 32    | 3   |
| 3101-75A*  | 50-75mm/2-3"     | ±3μm     | 84.5  | 8  | 44.5  | 3   |
| 3101-100A* | 75-100mm/3-4"    | ±3μm     | 109.5 | 8  | 57    | 3   |
| 3101-125A  | 100-125mm/4-5"   | ±3μm     | 135   | 10 | 70    | 3   |
| 3101-150A  | 125-150mm/5-6"   | ±3μm     | 160.5 | 10 | 82    | 3   |
| 3101-175A  | 150-175mm/6-7"   | ±4μm     | 186   | 12 | 94.5  | 5.5 |
| 3101-200A  | 175-200mm/7-8"   | ±4μm     | 211.5 | 12 | 107   | 5.5 |
| 3101-225A  | 200-225mm/8-9"   | ±4μm     | 236   | 23 | 129.5 | 5.5 |
| 3101-250A  | 225-250mm/9-10"  | ±4μm     | 261.5 | 23 | 142.5 | 5.5 |
| 3101-275A  | 250-275mm/10-11" | ±5μm     | 287   | 23 | 155   | 5.5 |
| 3101-300A  | 275-300mm/11-12" | ±5μm     | 312.5 | 23 | 167.5 | 5.5 |

### Friction thimble type


| Code       | Range       | Accuracy | L    | a | b  | c |
|------------|-------------|----------|------|---|----|---|
| 3101-25FA* | 0-25mm/0-1" | ±2μm     | 34.5 | 6 | 25 | 3 |

\* Supplied with manufacturer inspection certificate traceable to DKD Germany




3101-25A

data output

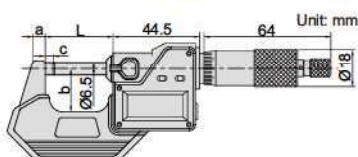

INSPECTION  
CERTIFICATE  
TRACEABLE TO DKD



- Resolution 0.001mm/0.00005" (resolution of 3101-275A and 3101-300A is 0.001mm/0.0001")
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Carbide measuring faces
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7306-30A, 7302-SPC6, 7305-SPC3A)

## DIGITAL OUTSIDE MICROMETERS (WITHOUT DATA OUTPUT)


- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- No data output
- LR44 battery, automatic power off
- Carbide measuring faces
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")

INSPECTION  
CERTIFICATE  
TRACEABLE TO DKD



3108-25A

without data output

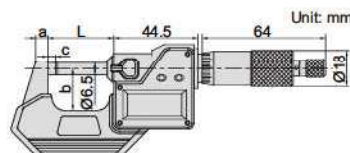

ATTENTION: NO  
DATA OUTPUT

IP65  
WATERPROOF



### Ratchet stop type

| Code       | Range          | Accuracy | L     | a  | b    | c   |
|------------|----------------|----------|-------|----|------|-----|
| 3108-25A*  | 0-25mm/0-1"    | ±2μm     | 34.5  | 6  | 25   | 3   |
| 3108-50A*  | 25-50mm/1-2"   | ±2μm     | 59.5  | 8  | 32   | 3   |
| 3108-75A*  | 50-75mm/2-3"   | ±3μm     | 84.5  | 8  | 44.5 | 3   |
| 3108-100A* | 75-100mm/3-4"  | ±3μm     | 109.5 | 8  | 57   | 3   |
| 3108-125A  | 100-125mm/4-5" | ±3μm     | 135   | 10 | 70   | 3   |
| 3108-150A  | 125-150mm/5-6" | ±3μm     | 160.5 | 10 | 82   | 3   |
| 3108-175A  | 150-175mm/6-7" | ±4μm     | 186   | 12 | 94.5 | 5.5 |
| 3108-200A  | 175-200mm/7-8" | ±4μm     | 211.5 | 12 | 107  | 5.5 |

### Friction thimble type

| Code       | Range       | Accuracy | L    | a | b  | c |
|------------|-------------|----------|------|---|----|---|
| 3108-25FA* | 0-25mm/0-1" | ±2μm     | 34.5 | 6 | 25 | 3 |

\* Supplied with manufacturer inspection certificate traceable to DKD Germany

## DIGITAL OUTSIDE MICROMETERS

ATTENTION: NO  
DATA OUTPUT



- Resolution 0.001mm/0.00005"
- Button function: on/off, set, mm/inch, ABS/INC
- No data output
- LR44 battery, automatic power off
- Carbide measuring faces
- Friction thimble
- Supplied with spherical anvil
- Setting standards are included (except 0-25mm/0-1")

INSPECTION  
CERTIFICATE  
TRACEABLE TO DKD



3109-25A

Unit: mm



| Code       | Range         | Accuracy | L   | a  | b    |
|------------|---------------|----------|-----|----|------|
| 3109-25A*  | 0-25mm/0-1"   | ±2μm     | 32  | 6  | 27.5 |
| 3109-50A*  | 25-50mm/1-2"  | ±2μm     | 57  | 8  | 37   |
| 3109-75A*  | 50-75mm/2-3"  | ±3μm     | 82  | 8  | 50   |
| 3109-100A* | 75-100mm/3-4" | ±3μm     | 107 | 10 | 61   |

\* Supplied with manufacturer inspection certificate traceable to DKD Germany