




DISK MICROMETERS

- Meet DIN863-3
- Measure root tangent length of gear
- Graduation 0.01mm
- Ratchet stop
- Supplied with setting standards




3282-25



Code	Range	Accuracy	Parallelism	L	b	c	D	S	d
3282-25	0-25mm	4µm	5µm	34	24	3.3	Ø20	0.7	Ø8
3282-50	25-50mm	4µm	5µm	59	32	3.3	Ø20	0.7	Ø8
3282-75	50-75mm	5µm	5µm	85	45	3.3	Ø20	0.7	Ø8
3282-100	75-100mm	5µm	5µm	110	57	3.3	Ø20	0.7	Ø8

NON-ROTATING SPINDLE DISK MICROMETERS


- Meet DIN863-3
- Measure root tangent length of gear
- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Supplied with setting standards



NON-ROTATING SPINDLE




3294-25



Code	Range	Accuracy	Parallelism	L	b
3294-25	0-25mm	4µm	5µm	34	24
3294-50	25-50mm	4µm	5µm	59	32
3294-75	50-75mm	5µm	5µm	85	45
3294-100	75-100mm	5µm	5µm	110	57

DIGITAL NON-ROTATING SPINDLE DISK MICROMETERS


- Measure root tangent length of gear
- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Supplied with setting standards
- Optional accessory: data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3)



NON-ROTATING SPINDLE

DATA OUTPUT


3594-25A

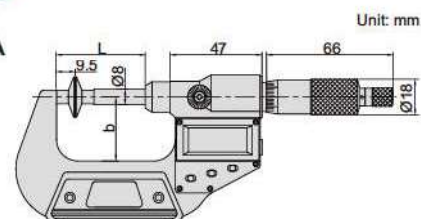

Code	Range	Accuracy	Parallelism	L	b
3594-25A	0-25mm/0-1"	±4µm	5µm	43	32
3594-50A	25-50mm/1-2"	±4µm	5µm	68	44.5
3594-75A	50-75mm/2-3"	±5µm	5µm	93	57
3594-100A	75-100mm/3-4"	±5µm	5µm	118.5	70

CALIPER TYPE MICROMETERS

- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)

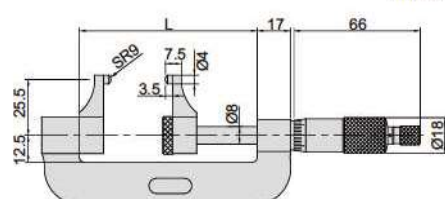

Unit: mm



3238-25

Code	Range	Accuracy	L
3238-25	0-25mm	5µm	56
3238-50	25-50mm	6µm	81