

DEPTH MICROMETERS

- Meet DIN863-2
- Graduation: 0.01mm
- Micrometer head accuracy: $\pm 3\mu\text{m}$
- Rod accuracy: $\pm (2+L/75)\mu\text{m}$, L is the measuring range in mm
- Rods with flat end
- Ratchet stop

Base: HxW=101.5x17mm



Code	Range	Rods
3241-25	0-25mm	1pc
3241-50	0-50mm	2pcs
3241-75	0-75mm	3pcs
3241-100	0-100mm	4pcs
3241-150	0-150mm	6pcs
3241-200	0-200mm	8pcs
3241-300	0-300mm	12pcs



3241-100

Base: HxW=63x17mm

Code	Range	Rods
3241-B25	0-25mm	1pc



DIGITAL HEIGHT GAGES (ECONOMIC MODEL)


ATTENTION:
LOW ACCURACY

ATTENTION: CAN NOT USE CLAMP
FOR PROTRACTORS (CODE 2372-CLAMP)

DATA
OUTPUT

- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, ABS/INC, data hold, TOL, set
- ABS/INC is for absolute and incremental measurement
- TOL is for tolerance measurement
- Carbide tipped scriber
- Made of stainless steel (except the base)
- LR44 battery
- Data output
- Supplied with dial test indicator holder
- Supplied with dust cover (except 1150-1500/2000)
- Optional accessory: data output cable (code 7301-SPC5)

scriber (included)






data output cable (optional)



dial test indicator
holder (included)


Unit: mm



1150-1000



1150-500

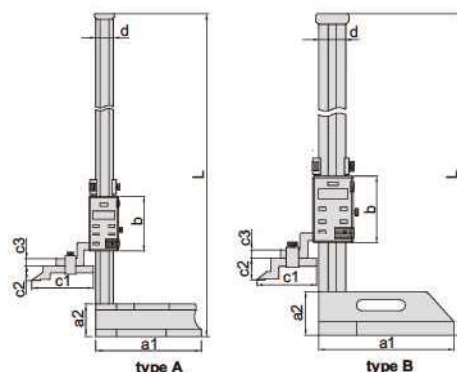

Code	Range	Type	Accuracy	L	a1	a2	b	c1	c2	c3	d	e	f
1150-300	0-300mm/0-12"	A	$\pm 0.05\text{mm}$	470	135	45	80	76	25	10	23	6	8
1150-500	0-500mm/0-20"	A	$\pm 0.06\text{mm}$	720	180	55	95	103	25	12	30	10	12
1150-600	0-600mm/0-24"	A	$\pm 0.06\text{mm}$	820	180	55	95	103	25	12	30	10	12
1150-1000	0-1000mm/0-40"	B	$\pm 0.08\text{mm}$	1275	250	80	125	110	39	15	50	10	15
1150-1500	0-1500mm/0-60"	B	$\pm 0.12\text{mm}$	1790	280	80	125	110	39	15	50	10	15
1150-2000	0-2000mm/0-80"	B	$\pm 0.16\text{mm}$	2290	280	80	125	110	39	15	50	10	15

dust cover
(included, except
1150-1500/2000)

