

## DIGITAL V-ANVIL MICROMETERS


- Measure the outside diameter of cutting tools (such as taps, reamers, end mills) with 3 flutes
- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards
- Optional accessory: data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3)



3590-153A

IP54  
WATERPROOF


DATA  
OUTPUT

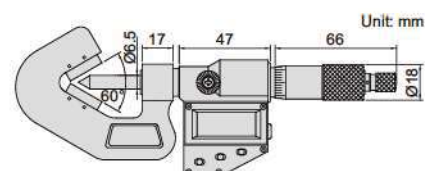

Code	Range	Flutes	Accuracy
3590-153A	1-15mm/0.04-0.6"	3	±4μm
3590-203A	5-20mm/0.2-0.8"	3	±4μm
3590-353A	20-35mm/0.8-1.4"	3	±5μm
3590-503A	35-50mm/1.4-2.0"	3	±5μm

NON-ROTATING  
SPINDLE

## NON-ROTATING SPINDLE UNIVERSAL MICROMETERS



3280-25A

- Meet DIN863-3
- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip
- Setting standards are included (except 0-25mm)
- Optional accessory: 55° anvil/spindle tip (code 3280-SP1 and 3280-SP2)

Code	Range	Accuracy	L	b
3280-25A	0-25mm	4μm	42	26
3280-50A	25-50mm	4μm	67	38

55° anvil/spindle tip (optional)

Code	Range	Accuracy	L	b
Code 3280-SP1 Knife-edge	0-35mm	4μm	42	26
Code 3280-SP2 Point	0-35mm	4μm	42	26

Anvil/spindle tip (included)

Unit: mm

Flat	Ø6.5	
Spherical	SR5 Ø6.5	
Spline	Ø2	
Disk	Ø12	
Blade	0.7	
Knife-edge	0.35 60°	
Point	Ø0.3 60°	

IP54  
WATERPROOF


DATA  
OUTPUT

## DIGITAL UNIVERSAL MICROMETERS

- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip (same as series 3280)
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: 55° anvil/spindle tip code 3280-SP1 and 3280-SP2 (same as series 3280), data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3)



3580-25A

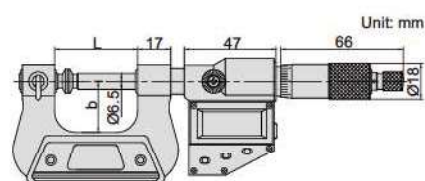

Code	Range	Accuracy	L	b
3580-25A	0-25mm/0-1"	±4μm	42	26
3580-50A	25-50mm/1-2"	±4μm	67	38