INDICATING MICROMETER

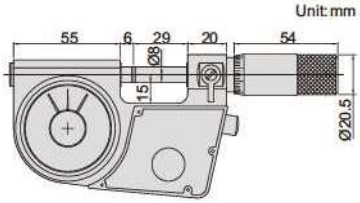

3333-25

- Meet DIN863-3
- Carbide measuring faces
- Measuring force 5-10N

Code	Micrometer head			Dial indicator		
	Range	Graduation	Accuracy	Range	Graduation	Accuracy
3333-25	0-25mm	0.01mm	2μm	±0.07mm	1μm	1μm

LIMIT MICROMETERS



3235-25A

- Used as Go/No-Go gauge by setting upper and lower limits
- Graduation 0.002mm
- Carbide measuring faces
- Supplied with setting standard (except 0-25mm)

(mm)

Code	Range	Accuracy	L	a	b
3235-25A	0-25mm	4μm	32	12	24
3235-50A	25-50mm	4μm	57	15	32



MICROMETERS WITH DIAL INDICATING

ATTENTION: NOT SUITABLE FOR 0.001MM INDICATORS

dial indicator is not included

3331-25A

- Meet DIN863-3
- Micrometer head graduation 0.01mm
- Anvil retracting range: 8mm
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)
- Optional accessory: dial indicators (graduation 0.01mm), digital indicators (resolution 0.01mm/0.0005")

(mm)
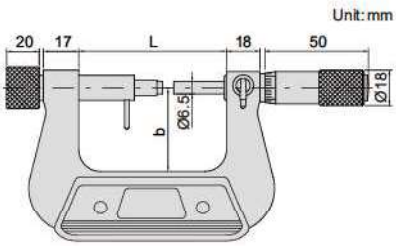
Code	Micrometer head range	Micrometer head accuracy	L	b
3331-25A	0-25mm	4μm	67	38
3331-50A	25-50mm	4μm	92.4	50
3331-75A	50-75mm	5μm	117.6	62
3331-100A	75-100mm	5μm	143	70
3331-125A	100-125mm	6μm	168.2	82
3331-150A	125-150mm	6μm	192	94.5
3331-175A	150-175mm	7μm	217	107