


OUTSIDE MICROMETERS WITH EXTENSION ANVIL COLLAR




adjust collars for different measuring ranges

- Graduation 0.01mm
- Adjust collars for different measuring ranges
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards

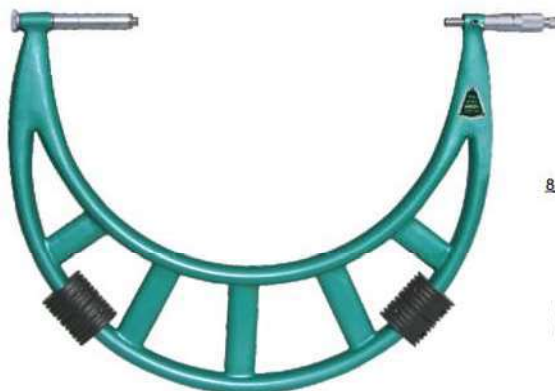

3205-400

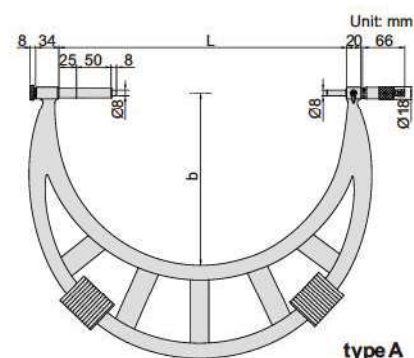


type A



setting standard (included)


Code	Range	Type	Accuracy	L	b	Setting standard (included)
3205-400	300-400mm	A	11μm	410	250	325, 375
3205-500	400-500mm	A	13μm	510	295	425, 475
3205-600	500-600mm	A	14μm	610	345	525, 575
3205-700	600-700mm	A	16μm	710	395	625, 675
3205-800	700-800mm	A	18μm	810	445	725, 775
3205-900	800-900mm	A	20μm	910	495	825, 875
3205-1000	900-1000mm	A	22μm	1010	545	925, 975
3205-1200	1000-1200mm	B	22μm	1210	645	1050, 1150
3205-1400	1200-1400mm	B	24μm	1410	745	1250, 1350
3205-1600	1400-1600mm	B	28μm	1610	845	1450, 1550
3205-1800	1600-1800mm	B	31μm	1810	945	1650, 1750
3205-2000	1800-2000mm	B	34μm	2010	1045	1850, 1950

(mm)

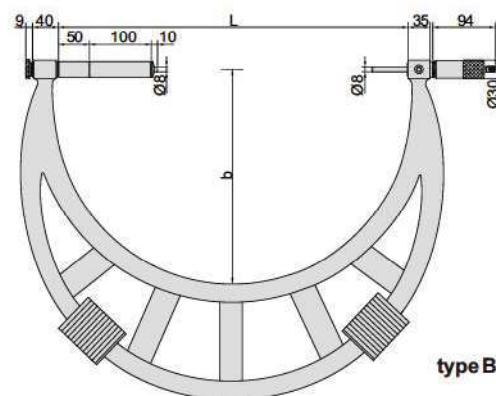


type B

INDICATING MICROMETERS



type A



type B

- Meet DIN863-3
- Micrometer head graduation: 0.002mm
- Dial indicator: range ± 0.04 mm, graduation 0.001mm, accuracy 0.001mm
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)



3332-25



3332-25B

Code	Micrometer head range	Micrometer head accuracy	Type	L	b	Remark
3332-25	0-25mm	4μm	A	28.5	19	with support
3332-50	25-50mm	4μm	A	53.5	30	with support
3332-75	50-75mm	5μm	A	78.5	45	without support
3332-100	75-100mm	5μm	A	103.5	57	without support
3332-25B	0-25mm	4μm	B	28.5	19	without support

(mm)