


## OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS





3206-400

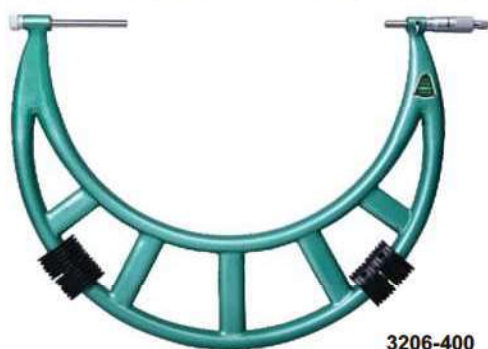


3206-150A

- Graduation 0.01mm
- Ratchet stop
- Meet DIN863-3
- Carbide measuring faces
- Supplied with setting standards



| Code      | Range      | Type | Accuracy | L    | b   | Setting standard (included)  |
|-----------|------------|------|----------|------|-----|------------------------------|
| 3206-50A  | 0-50mm     | A    | 4μm      | 58   | 35  | 25                           |
| 3206-100A | 0-100mm    | A    | 5μm      | 108  | 57  | 25, 50, 75                   |
| 3206-150A | 0-150mm    | A    | 6μm      | 158  | 82  | 25, 50, 75, 100, 125         |
| 3206-151A | 50-150mm   | A    | 6μm      | 158  | 82  | 50, 75, 100, 125             |
| 3206-200A | 100-200mm  | A    | 7μm      | 208  | 114 | 100, 125, 150, 175           |
| 3206-300A | 150-300mm  | A    | 9μm      | 308  | 165 | 150, 175, 200, 225, 250, 275 |
| 3206-301A | 200-300mm  | A    | 9μm      | 308  | 165 | 200, 225, 250, 275           |
| 3206-400  | 300-400mm  | B    | 11μm     | 409  | 224 | 325, 375                     |
| 3206-500  | 400-500mm  | B    | 13μm     | 509  | 275 | 425, 475                     |
| 3206-600  | 500-600mm  | B    | 14μm     | 609  | 321 | 525, 575                     |
| 3206-700  | 600-700mm  | B    | 16μm     | 709  | 371 | 625, 675                     |
| 3206-800  | 700-800mm  | B    | 18μm     | 809  | 426 | 725, 775                     |
| 3206-900  | 800-900mm  | B    | 20μm     | 909  | 476 | 825, 875                     |
| 3206-1000 | 900-1000mm | B    | 22μm     | 1009 | 576 | 925, 975                     |

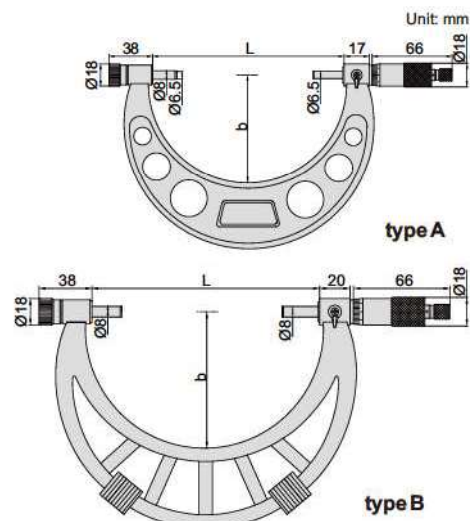

## DIGITAL OUTSIDE MICROMETERS WITH INTERCHANGEABLE ANVILS

IP54  
WATERPROOF

DATA  
OUTPUT


- Resolution 0.001mm/0.0001" (resolution of 3506-100A and 3506-150A is 0.001mm/0.00005")
- IP54 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards
- Optional accessory: data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3)



3506-100A



3506-400A



| Code       | Range             | Type | Accuracy | L    | b   | Setting standard (included)  |
|------------|-------------------|------|----------|------|-----|------------------------------|
| 3506-100A  | 0-100mm/0-4"      | A    | ±5μm     | 105  | 57  | 25, 50, 75                   |
| 3506-150A  | 0-150mm/0-6"      | A    | ±6μm     | 155  | 82  | 25, 50, 75, 100, 125         |
| 3506-300A  | 150-300mm/6-12"   | A    | ±8μm     | 305  | 165 | 150, 175, 200, 225, 250, 275 |
| 3506-301A  | 200-300mm/8-12"   | A    | ±8μm     | 305  | 165 | 200, 225, 250, 275           |
| 3506-400A  | 300-400mm/12-16"  | B    | ±9μm     | 405  | 224 | 325, 375                     |
| 3506-500A  | 400-500mm/16-20"  | B    | ±11μm    | 505  | 275 | 425, 475                     |
| 3506-600A  | 500-600mm/20-24"  | B    | ±12μm    | 605  | 321 | 525, 575                     |
| 3506-700A  | 600-700mm/24-28"  | B    | ±13μm    | 705  | 371 | 625, 675                     |
| 3506-800A  | 700-800mm/28-32"  | B    | ±15μm    | 805  | 426 | 725, 775                     |
| 3506-900A  | 800-900mm/32-36"  | B    | ±16μm    | 905  | 476 | 825, 875                     |
| 3506-1000A | 900-1000mm/36-40" | B    | ±17μm    | 1005 | 576 | 925, 975                     |

