



DATA OUTPUT

- Resolution 0.001mm/0.00005"
- Button function: on/off, set, mm/inch, ABS/INC, data output

 Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide measuring faces
- Optional accessory: data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3), setting ring (code 6312)

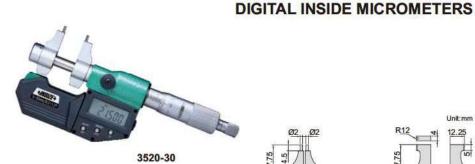




type C

Code	Range	Туре	Setting ring	Accuracy
3520-30	5-30mm/0.2-1.2"	Α	5mm (included)	±5µm
3520-50	25-50mm/1-2"	В	25mm (included)	±6µm
3520-75	50-75mm/2-3"	В	50mm (optional)	±7µm
3520-100	75-100mm/3-4"	С	75mm (optional)	±8µm



INTERNAL SCREW THREAD MICROMETERS






■ Ratchet stop

Optional accessary: measuring tips for internal screw thread micrometer (code **7385**)





Code	Range	Accuracy	Applicable tips
3640-45	20-45mm	4µm	stem length L=5mm
3640-70	45-70mm	5µm	stem length L=5mm
3640-95	70-95mm	5µm	stem length L=13.5mm
3640-120	95-120mm	6µm	stem length L=13.5mm



RELATIVE PRODUCT: GEAR BORE GAGE (CODE 2428)



- Measure over-pin diameter of gears
- Graduation 0.01mm
- Ratchet stop
- Optional accessary: ball tips (code 7383)

Code	Range	Accuracy
3637-50	25-50mm	4µm
3637-75	50-75mm	5µm

INTERNAL GEAR TOOTH MICROMETERS



