



INTERCHANGEABLE ANVIL MICROMETERS

- Measure tube thickness, shoulder edge distance, rivet head height, etc.
- Supplied with flat anvil and rod anvil
- Graduation 0.01mm
- Ratchet stop
- Carbide spindle tip
- Setting standards are included (except 0-25mm)



3262-25A



| Code | Range | Accuracy | L | d |
|----------|---------|----------|------|----|
| 3262-25A | 0-25mm | 4μm | 28.5 | Ø3 |
| 3262-50A | 25-50mm | 4μm | 53.5 | Ø5 |

DIGITAL INTERCHANGEABLE ANVIL MICROMETERS



IP54
WATERPROOF

DATA
OUTPUT

- Measure tube thickness, shoulder edge distance, rivet head height, etc.
- Supplied with flat anvil and rod anvil
- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide spindle tip
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3)



3562-25A

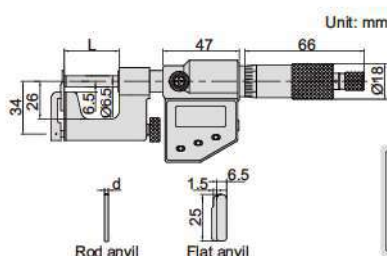

| Code | Range | Accuracy | L | d |
|----------|--------------|----------|------|----|
| 3562-25A | 0-25mm/0-1" | ±4μm | 28.5 | Ø3 |
| 3562-50A | 25-50mm/1-2" | ±4μm | 53.5 | Ø5 |

V-ANVIL MICROMETERS

- Meet DIN863-3
- Measure the outside diameter of cutting tools (such as taps, reamers, end mills) with 3 or 5 flutes
- Graduation 0.01mm
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards

| Code | Range | Flutes | Accuracy |
|-----------|---------|--------|----------|
| 3290-153A | 1-15mm | 3 | 4μm |
| 3290-203A | 5-20mm | 3 | 4μm |
| 3290-353A | 20-35mm | 3 | 5μm |
| 3290-503A | 35-50mm | 3 | 5μm |
| 3290-653A | 50-65mm | 3 | 6μm |
| 3290-803A | 65-80mm | 3 | 6μm |
| 3290-953A | 80-95mm | 3 | 7μm |
| 3290-255A | 5-25mm | 5 | 4μm |
| 3290-455A | 25-45mm | 5 | 5μm |
| 3290-655A | 45-65mm | 5 | 6μm |
| 3290-855A | 65-85mm | 5 | 7μm |



3290-153A

