


## FEELER GAGE STOCKS



- Used as shims to accurately set spacing
- Made of hardened alloy steel
- Length 300mm
- Width 13mm
- 10pcs/package



4622-10

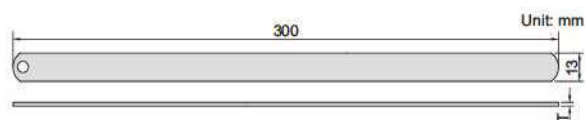

| Code    | Thickness (T) | Accuracy |
|---------|---------------|----------|
| 4622-02 | 0.02mm        | ±3μm     |
| 4622-03 | 0.03mm        | ±3μm     |
| 4622-04 | 0.04mm        | ±3μm     |
| 4622-05 | 0.05mm        | ±3μm     |
| 4622-06 | 0.06mm        | ±3μm     |
| 4622-07 | 0.07mm        | ±4μm     |
| 4622-08 | 0.08mm        | ±4μm     |
| 4622-09 | 0.09mm        | ±4μm     |
| 4622-10 | 0.10mm        | ±4μm     |
| 4622-12 | 0.12mm        | ±5μm     |

| Code    | Thickness (T) | Accuracy |
|---------|---------------|----------|
| 4622-15 | 0.15mm        | ±5μm     |
| 4622-18 | 0.18mm        | ±6μm     |
| 4622-20 | 0.20mm        | ±6μm     |
| 4622-25 | 0.25mm        | ±6μm     |
| 4622-30 | 0.30mm        | ±7μm     |
| 4622-35 | 0.35mm        | ±7μm     |
| 4622-40 | 0.40mm        | ±8μm     |
| 4622-45 | 0.45mm        | ±8μm     |
| 4622-50 | 0.50mm        | ±9μm     |
| 4622-55 | 0.55mm        | ±9μm     |


| Code     | Thickness (T) | Accuracy |
|----------|---------------|----------|
| 4622-60  | 0.60mm        | ±9μm     |
| 4622-65  | 0.65mm        | ±9μm     |
| 4622-70  | 0.70mm        | ±12μm    |
| 4622-75  | 0.75mm        | ±12μm    |
| 4622-80  | 0.80mm        | ±13μm    |
| 4622-85  | 0.85mm        | ±13μm    |
| 4622-90  | 0.90mm        | ±14μm    |
| 4622-95  | 0.95mm        | ±14μm    |
| 4622-100 | 1.00mm        | ±16μm    |

## FEELER GAGE TAPES

- Used as shims to accurately set spacing
- Made of hardened alloy steel
- Length 5m
- Width 13mm



4621-30

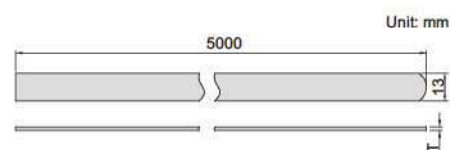

| Code    | Thickness (T) | Accuracy |
|---------|---------------|----------|
| 4621-02 | 0.02mm        | ±4μm     |
| 4621-03 | 0.03mm        | ±4μm     |
| 4621-04 | 0.04mm        | ±4μm     |
| 4621-05 | 0.05mm        | ±4μm     |
| 4621-06 | 0.06mm        | ±4μm     |
| 4621-07 | 0.07mm        | ±5μm     |
| 4621-08 | 0.08mm        | ±5μm     |
| 4621-09 | 0.09mm        | ±5μm     |
| 4621-10 | 0.10mm        | ±5μm     |
| 4621-12 | 0.12mm        | ±5μm     |

| Code    | Thickness (T) | Accuracy |
|---------|---------------|----------|
| 4621-15 | 0.15mm        | ±6μm     |
| 4621-18 | 0.18mm        | ±7μm     |
| 4621-20 | 0.20mm        | ±8μm     |
| 4621-25 | 0.25mm        | ±9μm     |
| 4621-30 | 0.30mm        | ±9μm     |
| 4621-35 | 0.35mm        | ±11μm    |
| 4621-40 | 0.40mm        | ±12μm    |
| 4621-45 | 0.45mm        | ±12μm    |
| 4621-50 | 0.50mm        | ±14μm    |
| 4621-55 | 0.55mm        | ±14μm    |


| Code     | Thickness (T) | Accuracy |
|----------|---------------|----------|
| 4621-60  | 0.60mm        | ±14μm    |
| 4621-65  | 0.65mm        | ±14μm    |
| 4621-70  | 0.70mm        | ±17μm    |
| 4621-75  | 0.75mm        | ±17μm    |
| 4621-80  | 0.80mm        | ±19μm    |
| 4621-85  | 0.85mm        | ±19μm    |
| 4621-90  | 0.90mm        | ±22μm    |
| 4621-95  | 0.95mm        | ±22μm    |
| 4621-100 | 1.00mm        | ±24μm    |

## PITCH GAGES

- Check the pitch of screw thread
- Accuracy: ±0.07mm
- Made of medium carbon steel



4824-12



| Code    | Range     | Thread type | Pitch of leaves included                                                | Quantity of leaves |
|---------|-----------|-------------|-------------------------------------------------------------------------|--------------------|
| 4824-12 | 2 - 20mm  | Tr30°       | 2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 16, 20mm                                | 12                 |
| 4824-16 | 1 - 12TPI | ACME 29°    | 1, 1-1/3, 1-1/2, 1-3/4, 2, 2-1/2, 3, 3-1/2, 4, 5, 6, 7, 8, 9, 10, 12TPI | 16                 |