


## WATERPROOF DIGITAL PROTRACTOR (HEAVY DUTY)



- Suitable for setting horizontal and vertical mitre angles of cutting machine
- Buttons: ON/OFF, HOLD/SUP, SPR/CNR/MTR/BVL
- IP54 dust/waterproof
- With transverse and longitudinal vials
- 2xAAA batteries
- Absolute level, zero setting is not needed when batteries are replaced
- Backlight will turn off in one minute after no data changing, automatic power off in 5 minutes




2174-225

IP54  
WATERPROOF

ABSOLUTE  
LEVEL

AUTOMATIC  
BACKLIGHT

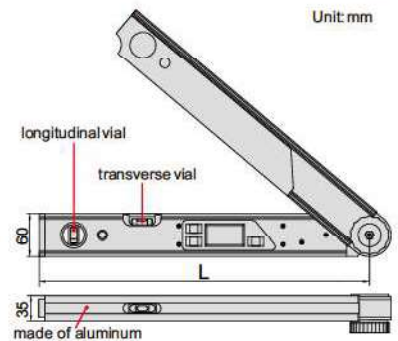


Unit: mm

Code	Size (L)	Range	Resolution	Accuracy
2174-225	460mm	0-225°	0.05°	±0.10°



## DIGITAL PROTRACTOR



2171-250




Unit: mm




- Buttons: on/off, hold (keep the reading), zero, ABS (absolute and incremental measurement)
- Fix the locking screw at 4 positions for different measuring ranges: 0°~225°, -225°~0°, -45°~180°, -180°~45°
- Remove the locking screw for 360° range
- With level vial
- Battery CR2032
- Automatic power off

Code	Size (L)	Range	Resolution	Accuracy
2171-250	250mm	0-360°	0.05°	±0.15°

## DIGITAL PROTRACTORS

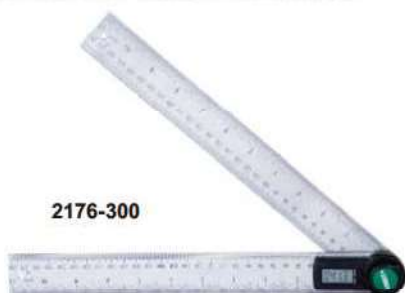


2176-300



Unit: mm

- Buttons: on/off, zero
- With clamping screw to lock the blades
- Graduation of blade: 1mm and 1/32"
- Made of stainless steel
- CR2032 battery
- Automatic power off




Code	Size (L)	Range	Resolution	Accuracy
2176-200	200mm	0-360°	0.1°	±0.3°
2176-300	300mm	0-360°	0.1°	±0.3°

## PROTRACTOR

- Made of stainless steel
- Satin chrome plated scale
- With clamping screw



4780-85



Unit: mm

Code	Size	Range	Graduation	Accuracy
4780-85	85x150mm	0-180°	1°	±0.3°