


DRILL POINT GAGE

- For twist drills with 118° angle, to check if the center of tip is concentric with the drill body
- Made of stainless steel

Code	Accuracy	
	Angle	Length
4843-1	±0.5°	±0.5mm



4843-1

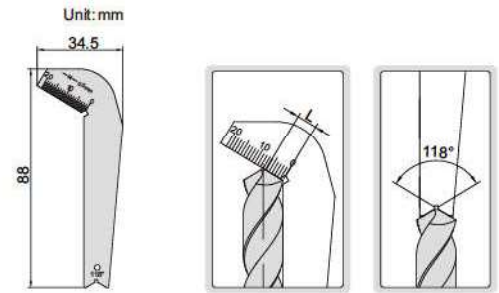


DRILL ANGLE GAGE

- Check drills with angle 60°, 70°, 90°, 118°, 125°, 135°, 150° or 160°
- Made of stainless steel


Code	Accuracy
4842-1	±0.5°



4842-1

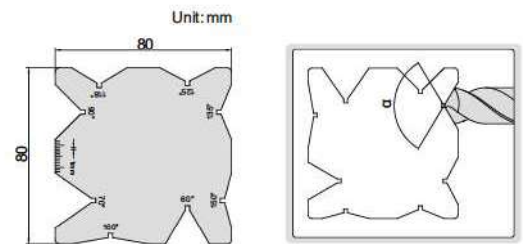

AMERICAN STANDARD WIRE GAGE




4808

- For gaging non-ferrous wire and metals such as copper, brass and aluminum
- Hardened and satin chrome finish

Code	Range
4808	0-36 (8.250-0.127mm/.3249-.0050")

No.	W	No.	W	No.	W
0	8.250mm (.3249")	13	1.820mm (.0720")	26	0.404mm (.0159")
1	7.350mm (.2893")	14	1.630mm (.0641")	27	0.361mm (.0142")
2	6.540mm (.2576")	15	1.450mm (.0571")	28	0.320mm (.0126")
3	5.830mm (.2294")	16	1.290mm (.0508")	29	0.287mm (.0113")
4	5.190mm (.2043")	17	1.150mm (.0453")	30	0.254mm (.0100")
5	4.620mm (.1819")	18	1.020mm (.0403")	31	0.226mm (.0089")
6	4.110mm (.1620")	19	0.912mm (.0359")	32	0.203mm (.0080")
7	3.670mm (.1443")	20	0.813mm (.0320")	33	0.180mm (.0071")
8	3.260mm (.1285")	21	0.724mm (.0285")	34	0.160mm (.0063")
9	2.910mm (.1144")	22	0.643mm (.0253")	35	0.142mm (.0056")
10	2.590mm (.1019")	23	0.574mm (.0226")	36	0.127mm (.0050")
11	2.300mm (.0907")	24	0.511mm (.0201")		
12	2.050mm (.0808")	25	0.440mm (.0179")		

U.S. STANDARD SHEET METAL GAGE



4809

- For gaging sheet metal, plate iron and steel
- Hardened and satin chrome finish

Code	Range
4809	0-36 (7.938-0.179mm/.3125-.0070")

No.	W	No.	W	No.	W
0	7.938mm (.3125")	13	2.381mm (.0938")	26	0.476mm (.0188")
1	7.144mm (.2813")	14	1.984mm (.0781")	27	0.437mm (.0172")
2	6.747mm (.2656")	15	1.786mm (.0703")	28	0.397mm (.0156")
3	6.350mm (.2500")	16	1.588mm (.0625")	29	0.357mm (.0141")
4	5.953mm (.2344")	17	1.429mm (.0563")	30	0.318mm (.0125")
5	5.556mm (.2188")	18	1.270mm (.0500")	31	0.278mm (.0109")
6	5.159mm (.2031")	19	1.111mm (.0438")	32	0.258mm (.0102")
7	4.763mm (.1875")	20	0.953mm (.0375")	33	0.238mm (.0094")
8	4.366mm (.1719")	21	0.873mm (.0344")	34	0.218mm (.0086")
9	3.969mm (.1563")	22	0.794mm (.0313")	35	0.198mm (.0078")
10	3.572mm (.1406")	23	0.714mm (.0281")	36	0.179mm (.0070")
11	3.175mm (.1250")	24	0.635mm (.0250")		
12	2.778mm (.1094")	25	0.556mm (.0219")		