

**ABSOLUTE
LEVEL**

BACKLIGHT


**BUZZER ALARM
AT 0° AND 90°**

- With transverse and longitudinal vials
- Used as level and protractor
- Aluminum frame
- Magnetic bottom
- The sea level is permanently set inside the chip, zero setting is not needed when batteries are replaced
- Buttons: ON/OFF, absolute and incremental measurement, keep the reading, buzzer alarm, unit (mm/m, %, in/ft) conversion, backlight
- The display flips over when the bottom faces up
- Two AAA batteries
- Automatic power off

DIGITAL LEVEL



4910-600

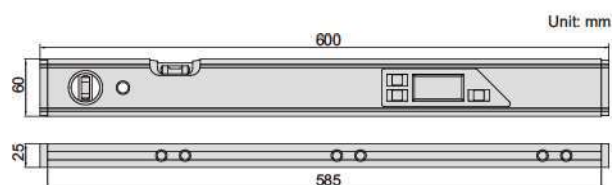

Code	Range	Resolution	Accuracy
4910-600	0-360° (90°x4)	0.1° (=1.745mm/m)	0° and 90°: ±0.1°; others: ±0.2°


ALUMINUM ALLOY LEVELS

- Die casting aluminum alloy frame
- With three vials: 180°, 90° and 45°
- Zero position of vial 180° can be set



4911-600


Code	Length (L)	Accuracy
4911-400	400mm	0.75mm/m
4911-600	600mm	0.75mm/m
4911-800	800mm	0.75mm/m

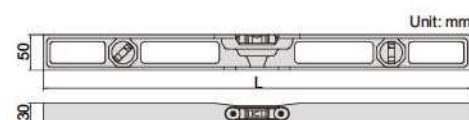

MAGNETIC BASE

**VIALS MADE IN ISRAEL
LIFETIME WARRANTY**

- Shockproof vials
- Magnetic base
- Shock absorbing rubber end caps
- Working temperature: -15°C ~ 55°C



PORTABLE LEVEL

packaging



4912-100

Code	Size (L)	Accuracy
4912-100	100mm	0.5mm/m (.006in/ft)

MAGNETIC BASE

**VIALS MADE IN ISRAEL
LIFETIME WARRANTY**

- Shockproof horizontal and vertical vials
- Magnetic base
- Working temperature: -15°C~55°C
- Cast aluminum body


packaging



CAST ALUMINUM LEVEL



4913-250

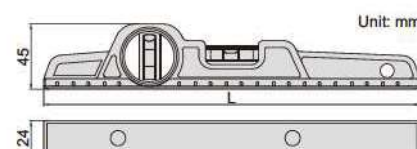

Code	Size (L)	Accuracy
4913-250	250mm	0.5mm/m (.006in/ft)