


ROUND BODY DIAL TEST INDICATOR

- Meet DIN2270
- Jeweled bearing
- Carbide contact point
- Adjustable two measuring directions
- Anti magnetic body
- Supplied with two clamps:
diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 109)




JEWELLED BEARING

INSPECTION CERTIFICATE
TRACEABLE TO NIST



2391-08

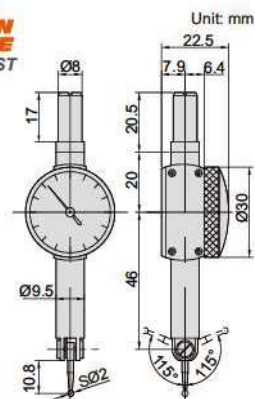

Code	Range	Graduation	Accuracy	Hysteresis	Dial reading
2391-08 *	0.8mm	0.01mm	13µm	3µm	0-40-0

* Supplied with manufacturer inspection certificate traceable to NIST USA

CLAMPS FOR DIAL TEST INDICATORS


Code	ØD
6298-1	Ø4mm
6298-2	Ø8mm



6298-1



6298-2



STYLI FOR DIAL TEST INDICATORS



6284-3

(mm)				
Code	For dial test indicator	Material of contact point	L	D
6284-1	2380-08,	steel	13.5	SØ1
6284-3	2398-08	carbide	13.5	SØ2
6284-4	2381-08,	ruby	13.5	SØ2
6284-8	2399-08	carbide	13.5	SØ3
6284-21	2380-02	steel	12.5	SØ1
6284-22	2381-02	carbide	12.5	SØ2
6284-23		carbide	12.5	SØ3
6284-44	2880-02	carbide	11.7	SØ0.4
6284-41	2880-02R	carbide	11.7	SØ1
6284-42	2895-08	carbide	11.7	SØ2
6284-45	2897-02	ruby	11.7	SØ2
6284-43	2898-08	carbide	11.7	SØ3
6284-71	2391-08	carbide	10.8	SØ2

(mm)				
Code	For dial test indicator	Material of contact point	L	D
6284-51		carbide	34.6	SØ1
6284-52	2896-05	carbide	34.6	SØ2
6284-55	2899-05	ruby	34.6	SØ2
6284-53		carbide	34.6	SØ3
6284-61		steel	13.5	SØ1
6284-62	2386-16A	carbide	13.5	SØ2
6284-63		ruby	13.5	SØ2
6284-64		carbide	13.5	SØ3
6284-81		steel	27.4	SØ1
6284-82	2383-08A	carbide	27.4	SØ2
6284-83		ruby	27.4	SØ2
6284-84		carbide	27.4	SØ3


DIAL TEST INDICATOR UNIVERSAL HOLDER

- Set the indicators at the desired attitude to the workpiece

Code
6297-1



6297-1

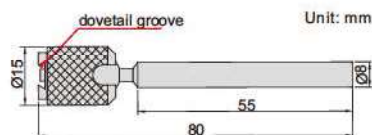

DIAL TEST INDICATOR HOLDER

- Supplied with hex key

Code
6296-1



6296-1

