INDICATOR CENTERING HOLDER

- Center cylinders or holes on machine tools
- Can be used with dial test indicators or dial indicators

6294-1A

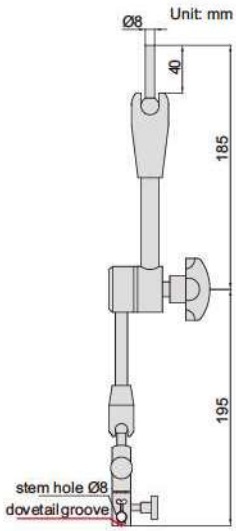

Code
6294-1A

3D ELECTRONIC EDGE FINDERS

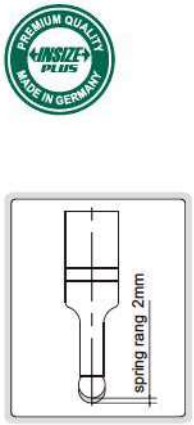

X-Y edge finder



Z axial setting





6571-1 6571-2

6571-1

6571-2

Code	Shank	Contact ball	Accuracy	Battery
6571-1	Ø16mm	SØ10mm	10μm	A23S, 12Vx1pc
6571-2	Ø20mm	SØ10mm	10μm	A23S, 12Vx1pc

- The shank is electrically conducted to the metal workpiece through the chuck and table, the LED lights up, when the ball touches the workpiece
- Not suitable for rotary use
- Hardened contact ball

ELECTRONIC EDGE FINDERS

- The shank is electrically conducted to the metal workpiece through the chuck and table, the LED lights up and the beeper sounds(only for **6566-3**), when the ball touches the workpiece
- Not suitable for rotary use
- Hardened shank and contact ball



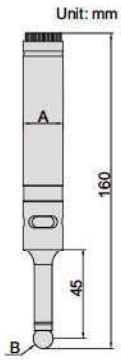

6566-2

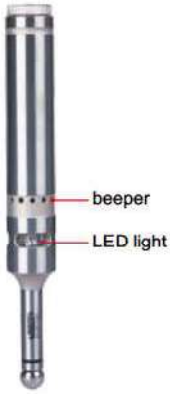

6566-3

Code	Shank (A)	Contact ball (B)	Accuracy	Beeper	Battery
6566-2	Ø20mm	SØ10mm	5μm	without	23AE, 12Vx1pc
6566-3	Ø20mm	SØ10mm	5μm	with	23AE, 12Vx1pc