

MICROMETER STAND

- Suitable for micrometers up to 100mm


Code

6300



6300

Unit: mm



MICROMETER SETTING STANDARDS



6310-100




type A



6310-300

Code	Length	Type	Accuracy	D
6310-25	25	A	±1.5μm	Ø7
6310-50	50	A	±2μm	Ø7
6310-75	75	A	±2.5μm	Ø7
6310-100	100	A	±3μm	Ø8
6310-125	125	A	±3.5μm	Ø8
6310-150	150	A	±4μm	Ø8
6310-175	175	A	±4.5μm	Ø8
6310-200	200	A	±5μm	Ø8
6310-225	225	A	±5.5μm	Ø8
6310-250	250	A	±6μm	Ø8
6310-275	275	A	±6.5μm	Ø8
6310-300	300	B	±7μm	Ø16
6310-325	325	B	±7.5μm	Ø16
6310-350	350	B	±8μm	Ø16
6310-375	375	B	±8.5μm	Ø16
6310-400	400	B	±9μm	Ø16
6310-425	425	B	±9.5μm	Ø16

Code	Length	Type	Accuracy	D
6310-450	450	B	±10μm	Ø16
6310-475	475	B	±10.5μm	Ø16
6310-500	500	B	±11μm	Ø16
6310-525	525	B	±11.5μm	Ø16
6310-575	575	B	±12.5μm	Ø16
6310-625	625	B	±13.5μm	Ø16
6310-675	675	B	±14.5μm	Ø16
6310-725	725	B	±15.5μm	Ø16
6310-775	775	B	±16.5μm	Ø16
6310-825	825	B	±17.5μm	Ø16
6310-875	875	B	±18.5μm	Ø16
6310-925	925	B	±19.5μm	Ø16
6310-975	975	B	±20.5μm	Ø16
6310-1050	1050	B	±22μm	Ø23
6310-1150	1150	B	±24μm	Ø23
6310-1250	1250	B	±26μm	Ø23
6310-1350	1350	B	±28μm	Ø23

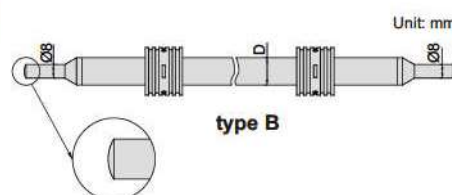

type B

Unit: mm

Code	Length	Type	Accuracy	D
6310-1450	1450	B	±30μm	Ø23
6310-1550	1550	B	±32μm	Ø23
6310-1650	1650	B	±34μm	Ø23
6310-1750	1750	B	±36μm	Ø23
6310-1850	1850	B	±38μm	Ø23
6310-1950	1950	B	±40μm	Ø23


IP54
WATERPROOF

DATA
OUTPUT


- Resolution 0.001mm/0.00005"
- IP54 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Optional accessory: data output cable (code 7306-30, 7302-SPC2A, 7305-SPC3)




6353-25W

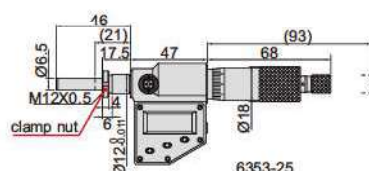

6353-25



6353-25WS

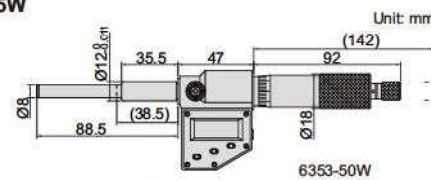


6353-50W

Rotating spindle

Code	Range	Stem	Spindle tip	Accuracy
6353-25	0-25mm/0-1"	with clamp nut	flat (carbide)	±2μm
6353-25W	0-25mm/0-1"	plain	flat (carbide)	±2μm
6353-25S	0-25mm/0-1"	with clamp nut	spherical (SR5)	±2μm
6353-25WS	0-25mm/0-1"	plain	spherical (SR5)	±2μm
6353-50W	0-50mm/0-2"	plain	flat (carbide)	±4μm

Non-rotating spindle

Code	Range	Stem	Spindle tip	Accuracy
6354-25W	0-25mm/0-1"	plain	flat	±2μm

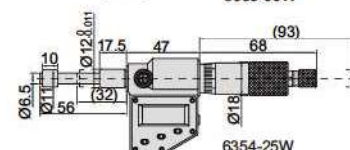

6354-25W