




LINEAR GAGE
IP65
WATERPROOF



linear gage



- Linear gage: shock-proof, water proof, dust proof, suitable for high speed movement, long working life
- Display unit: set tolerance and make judgment (out of upper limit, within tolerance, out of lower limit), output the judgment to control outside devices, set zero and hold reading from outside

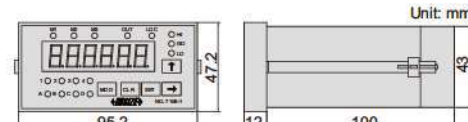


LINEAR GAGE SPECIFICATION

Code	7106-11	7106-12
Measuring range	12mm	12mm
Resolution	0.01mm	0.001mm
Accuracy	20μm	5μm
Hysteresis	10μm	2μm
Measuring principle	capacity system	
Voltage	5V	
Sampling frequency	100 times/sec.	
Working life	ten million times	
Dust/waterproof	IP65	
Measuring force	1.5N	
Cable length	2m	
Data output	four-core wire	


DISPLAY UNIT SPECIFICATION

Code	7106-1
Display	6 digits
Quantity of linear gages to be connected	1pc
Tolerance	set tolerance and make judgment with alarm and lights (out of upper limit, within tolerance, out of lower limit)
Output control	output the tolerance judgment (out of upper tolerance, within tolerance, out of lower tolerance) to control outside devices
Outside control	control the display units from outside (set zero, hold reading)
Data output	connect to PC
Power supply	DC 9~24V

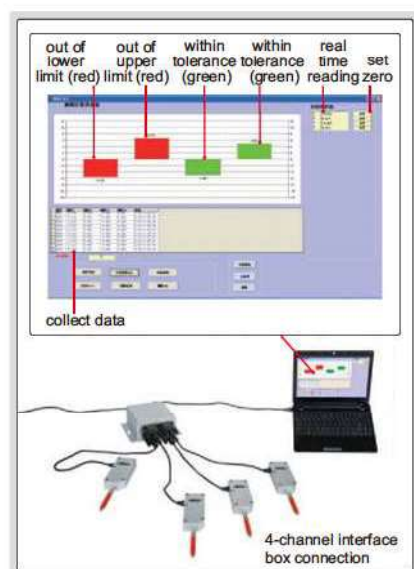

INTERFACE BOX SPECIFICATION

Code	7107-1	7107-2
Quantity of linear gages to be connected	4pcs	8pcs
Data port	RS232 and RS485	
Power supply	DC 9~24V	

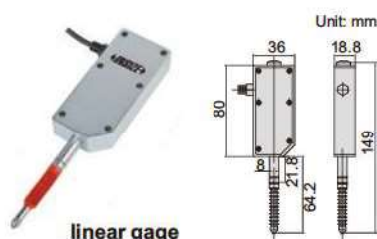


- Software is supplied with interface boxes. In the software, it is possible to set tolerance of each channel and show judgment (red when out of tolerance, green when within tolerance), set zero, collect data manually or automatically (time is adjustable), output data to Excel, print report

MULTI LINEAR GAGE SYSTEM


LINEAR GAGE
IP65
WATERPROOF



4-channel interface box 7107-1



8-channel interface box 7107-2



LINEAR GAGE SPECIFICATION

Code	7107-11	7107-12
Measuring range	12mm	12mm
Resolution	0.01mm	0.001mm
Accuracy	20μm	5μm
Hysteresis	10μm	2μm
Measuring principle	capacity system	
Voltage	5V	
Sampling frequency	100 times/sec.	
Working life	ten million times	
Dust/waterproof	IP65	
Measuring force	1.5N	
Cable length	2m	
Data output	RS232	