


STEEL RULES

ATTENTION:
BASIC MODEL



7110-300


- Graduation: 0.5mm, 1mm, 1/64", 1/32", 1/16"
- Semi-flexible rules
- Made of stainless steel
- Non-glare surface

Code	Range	Accuracy	L	W	H	Remark
7110-150	150mm/6"	±0.15mm	170	18	1.0	graduation on front and back
7110-200	200mm/8"	±0.15mm	220	18	1.0	graduation on front and back
7110-300	300mm/12"	±0.15mm	330	25	1.0	graduation on front and back
7110-3001	300mm/12"	±0.15mm	325	30	1.0	graduation on front and back
7110-500	500mm/20"	±0.15mm	530	30	1.2	graduation on front and back
7110-600	600mm/24"	±0.20mm	630	30	1.2	graduation on front and back
7110-1000	1000mm/40"	±0.20mm	1040	32	1.5	graduation on front and back
7110-1200	1200mm/48"	±0.22mm	1240	35	1.8	graduation on front
7110-1500	1500mm/60"	±0.25mm	1550	38	1.8	graduation on front
7110-2000	2000mm/80"	±0.30mm	2065	40	2.0	graduation on front


STRAIGHT EDGES



7111-300A

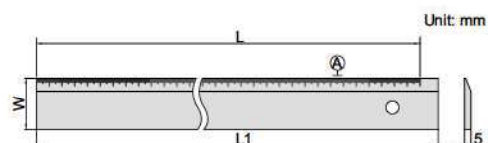

- Check flatness and straightness, as well as for marking
- Graduation on the beveled edge
- Made of hardened tool steel
- Chrome plated





Code	Range (L)	Straightness of A	L1	W
7111-300A	300mm	0.02mm	320	40
7111-500A	500mm	0.03mm	520	40
7111-1000A	1000mm	0.04mm	1020	50

MARKING GAGES




7120-200A

- Made of carbon steel
- Satin chrome plated




Code	Range	Graduation	Accuracy	L	W
7120-200A	0-200mm	0.1mm	±0.1mm	250	40
7120-250A	0-250mm	0.1mm	±0.1mm	300	40
7120-300A	0-300mm	0.1mm	±0.1mm	350	40

T-SHAPE MARKING GAGE



1275-150A

- Made of stainless steel
- Satin chrome plated reading surface

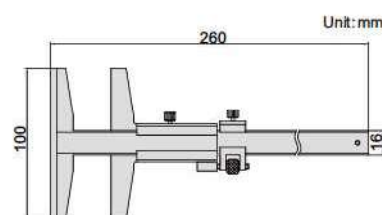

Code	Range	Graduation	Accuracy
1275-150A	0-150mm	0.05mm	±0.05mm