

WEBSTER HARDNESS TESTERS

- To measure the hardness of soft metal such as aluminum alloy, copper, brass, soft steel, etc.
- According to ASTM B647-84 (2000)



VIDEO

STANDARD DELIVERY

Main unit	1pc
Spare indenter	1pc
Hardness test block	1pc
Wrench	1pc

SPECIFICATION

Code	ISHW-L20	ISHW-L20A	ISHW-L20B	ISHW-B70	ISHW-B75	ISHW-B92
Application	for aluminum alloy general use	for aluminum alloy thick workpiece	for aluminum alloy small tube	for hard aluminum alloy and hard brass	for soft brass and copper	for soft steel and cold-rolled steel
Thickness requirement of flat workpiece	0.6~6mm	0.6~13mm	0.6~8mm	0.6~6mm	0.6~6mm	0.6~6mm
Internal diameter requirement of tube workpiece	>Ø10mm	>Ø10mm	>Ø6mm	>Ø10mm	>Ø10mm	>Ø10mm
Wall thickness requirement of tube workpiece	0.6~6mm	6~13mm (internal diameter Ø10~23.3mm) 0.6~6mm (internal diameter >Ø23.3mm)	0.6~8mm	0.6~6mm	0.6~6mm	0.6~6mm
Hardness range	0~20HW					
Min. reading	1HW					
Accuracy	±0.5HW (at 5~17HW)					
Dimension	205×30×85mm					
Weight	500g					



ISHW-L20

DIGITAL SHORE DUROMETERS

- According to ISO868, ISO7619, ASTM D 2240
- Average and peak (max.) mode
- Dwell time is adjustable
- Low and high limits with judgement
- 500 memories
- Wireless connection to printer
- Handhold use or work with test stand (code ISH-DS-STAND)
- Automatic power off

DATA OUTPUT



VIDEO

SPECIFICATION

Code	ISH-DSA	ISH-DSD
Unit	Shore A	Shore D
Test material	soft plastic, soft rubber, etc.	hard plastic, hard rubber, etc.
Measuring range*	0~100HA	0~100HD
Resolution	0.1HA	0.1HD
Accuracy	±1HA	±1HD
Indenter protrusion	2.5mm	
Output	wireless and USB	
Power supply	built-in rechargeable battery	
Dimension	153×50×29mm	
Weight	170g	

STANDARD DELIVERY

Main unit	1pc
Calibration block	1pc
USB cable and software	1pc
AC/DC adapter	1pc



blunt taper indenter

ISH-DSA

sharp point indenter

ISH-DSD



software CD (included)



calibration block (included)



printer (optional)

OPTIONAL ACCESSORY

Printer	ISH-DS-PRINTER
Test stand	ISH-DS-STAND
1kg weight block (for ISH-DSA)	ISH-DSA-W1
5kg weight block (for ISH-DSD)	ISH-DSD-W5

* Use ISH-DSD when measuring result is higher than 90HA
Use ISH-DSA when measuring result is lower than 20HD



TEST STAND FOR DIGITAL SHORE DUROMETERS CODE ISH-DS-STAND

- For digital shore durometers (code **ISH-DSA** and **ISH-DSD**)
- Can perform repeatable hardness measurement due to fewer possibilities of human error or measurement variations
- 1kg weight block is for **ISH-DSA**, 5kg weight block is for **ISH-DSD**

SPECIFICATION

Stage diameter	Ø88mm
Maximum workpiece height	75mm
Dimension	125×163×350mm
Weight	4kg

STANDARD DELIVERY

Test stand	1pc
Durometer supporter	1pc

OPTIONAL ACCESSORY

1kg weight block (for ISH-DSA)	ISH-DSA-W1
5kg weight block (for ISH-DSD)	ISH-DSD-W5



5kg weight block (optional) for ISH-DSD




SHORE DUROMETERS

- According to ISO868, ISO7619, ASTM D 2240
- With peak value indicator
- Handhold use or work with test stand (code **ISH-OS2**)

SPECIFICATION

Code	ISH-S30A	ISH-S30D
Scale	Shore A	Shore D
Test material	soft plastic, soft rubber, etc.	hard plastic, hard rubber, etc.
Measuring range*	0~100HA	0~100HD
Resolution	1HA	1HD
Accuracy	±0.5HA	±0.5HD
Indenter protrusion	2.5mm	
Bezel diameter	57mm	
Overall height	121mm	
Weight	184g	

- * Use **ISH-S30D** when measuring result is higher than 90HA
Use **ISH-S30A** when measuring result is lower than 20HD

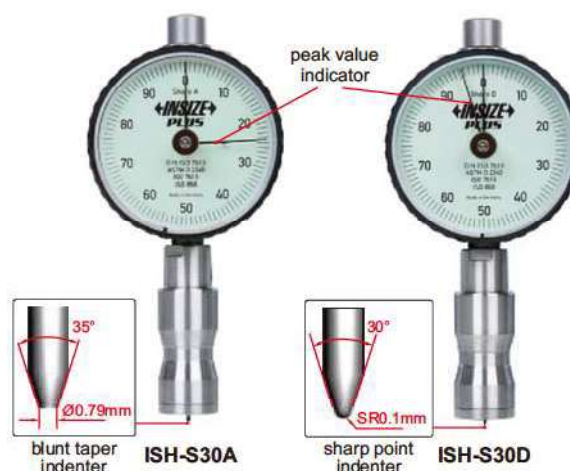

HARDNESS TEST BLOCKS FOR SHORE DUROMETERS

SPECIFICATION

Code	ISH-S30A-BLOCK	ISH-S30D-BLOCK
Type	Shore A	Shore D
Hardness value	7pcs/set: 30, 40, 50, 60, 70, 80, 90HA	3pcs/set: 60, 75, 85HD



ISH-S30A-BLOCK



ISH-S30D-BLOCK