


## ZOOM STEREO MICROSCOPE

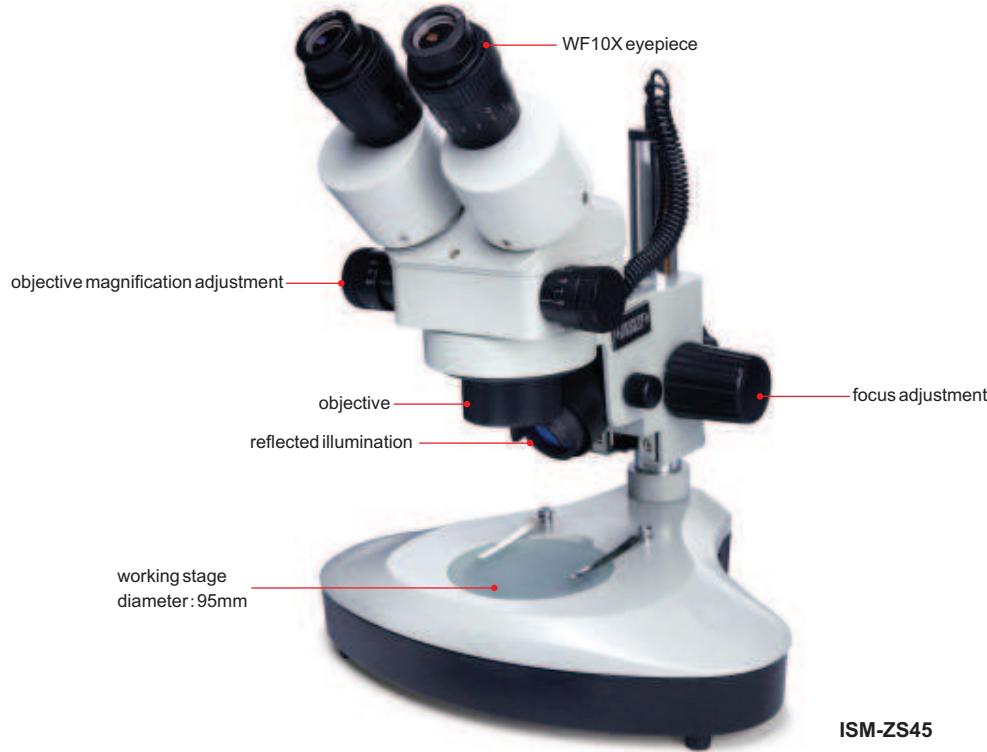

**ISM-ZS45**

### SPECIFICATION

Code	ISM-ZS45*	ISM-ZS45T*
<b>Optical tube</b>	binocular	trinocular
<b>Eyepiece(wide field)</b>	10X (view field: Ø20mm)	
<b>Objective</b>	0.7X-4.5X (zoom)	
<b>Pupil distance</b>	55-75mm(adjustable)	
<b>Diopter adjustment</b>	±5 diopter(two eyepieces)	
<b>Working distance of objective</b>	55mm	
<b>Max. workpiece height</b>	145mm	
<b>Illumination</b>	selectable reflected and transmitted illumination (brightness is adjustable)	
<b>Dimension(L×W×H)</b>	310×250×420mm	
<b>Weight</b>	6kg	

### STANDARD DELIVERY

Main unit	1pc
WF10X eyepiece	2pcs
Eyepiece patch	2pcs
Ø95mm frosted glass plate	1pc
Ø42mm frosted glass plate	1pc
Ø80mm steel support ring	1pc
Ø95mm white/black plate	1pc
Spare transmitted lamp (6V, 20W)	1pc
Spare reflected lamp (6V, 15W)	1pc
Anti-dust cover	1pc

### OPTIONAL ACCESSORY

<b>Auxiliary objective</b>	0.5X	ISM-ZS45-OB05X
	0.75X	ISM-ZS45-OB075X
	1.5X	ISM-ZS45-OB1D5X
	2X	ISM-ZS45-OB2X
<b>Eyepiece</b>	WF5X (view field: Ø22mm)	ISM-ZS45-EP5X
	WF15X (view field: Ø16mm)	ISM-ZS45-EP15X
	WF20X (view field: Ø12mm)	ISM-ZS45-EP20X
	WF25X (view field: Ø9mm)	ISM-ZS45-EP25X
<b>Digital camera</b>		ISM-D300B
		ISM-D500

\*Add suffix on code No. to devote AC voltage and plug (refer to page V1)