

PROFILE PROJECTORS

Screen diameter: 300mm

X-Y travel: 200x100mm



ISP-AZ3020




ISP-A5000E

digital readout of ISP-A5000E

- Adjust the focus by ascending and descending the projector head, the stage doesn't move up and down
- Maximum workpiece weight 50kg

- touch buttons
- USB data output to Excel and CAD
- show diagram directly

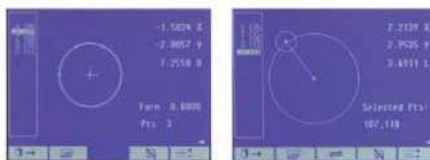

software CD
(included, only for ISP-A5000E)

OPTIONAL ACCESSORY



lens



overlay chart (protractor with 1° graduation, radius with 1mm increment)



50mm reading scale
(check magnification accuracy)



300mm calibration scale (check magnification accuracy together with 50mm reading scale or calibrate measuring accuracy)



demo sample


















printer (only for ISP-A5000E)

To be continued

Continued from previous page

SPECIFICATION

Code		ISP-AZ3020		ISP-A5000E	
Edge detector		not included		included	
Lens	magnification	10X (included)	20X (optional)	50X (optional)	100X (optional)
	view field	Ø30mm	Ø15mm	Ø6mm	Ø3mm
	working distance	77.7mm	44.3mm	38.4mm	25.3mm
Max. workpiece height		100mm	100mm	100mm	100mm
Magnification accuracy		±0.08%			
Image		erect image			
Projector screen		diameter: Ø300mm			
		rotation range: 0°~360°, resolution: 1' or 0.01°			
		reference lines: cross-hairs			
Stage	metal stage size	404×228mm			
	glass stage size	260×160mm			
	X-Y stage travel	range: 200×100mm			
		resolution: 0.5µm			
		accuracy: (3+L/75)µm L is the measuring length in mm			
	Z(focus) travel range	100mm			
max. load capacity	50kg				
Illumination		contour illumination: 24V/150W halogen lamp, brightness is adjustable			
		surface illumination: 24V/150W halogen lamp, brightness is adjustable			
Data processing unit	display	X-Y stage travel, screen rotation			
	output	RS232C		RS232C, USB (data output to Excel and CAD)	
	function	 measure coordinate of point	 measure coordinate of point		
		 measure coordinate of line	 measure coordinate of line		
		 measure center coordinate, radius of circle with three points	 measure center coordinate, radius of circle with three points		
		 measure distance between two objects	 measure distance between two objects		
		 measure angle with four points or two lines	 measure angle with four points or two lines		
		 set origin of coordinate	 coordinate transform		
		 coordinate transform	 choose measurement object automatically according to the selective point and display the result		
		 set midpoint of coordinate			
advanced function	—		programming for batch measurements		
Powersupply		110/220V, 50/60Hz			
Dimension (L×W×H)		780×780×1100mm			
Weight		160ka			

STANDARD DELIVERY

Main unit	1pc
10X lens with half-reflection mirror and oblique illuminator mirror	1pc
Overlay chart clip	4pcs
Foot-switch	1pc
Anti-dust cover	1pc
USB cable and software (only for ISP-A5000E)	1pc

OPTIONAL ACCESSORY

20X lens with half-reflection mirror and oblique illuminator mirror	ISP-A5000-LENS20X	50mm reading scale	ISP-A5000-SCALE50
50X lens with half-reflection mirror	ISP-A5000-LENS50X	300mm calibration scale	ISP-A5000-RULE
100X lens with half-reflection mirror	ISP-A5000-LENS100X	Demo sample	ISP-A5000-DEMO
Overlay chart	ISP-A5000-CHART	Printer (only for ISP-A5000E)	ISP-A5000-PRINTER