


- For rigid borescopes (code ISV-1Hxx, ISV-HF4030, ISV-HMxx, ISV-HPxx, ISV-HR6032)



LED LIGHT HANDLE CODE ISV-1HLED



SPECIFICATION

Power	3W
Battery	3.7V rechargeable battery (for 2 hours working)
Dimension	120×27×27mm
Weight	300g

STANDARD DELIVERY

Main unit	1pc
Battery	1pc
Charger	1pc

- For rigid borescopes (code ISV-1Hxx)
- High LED illumination and brightness is adjustable
- For long time work with low noise



ADJUSTABLE LED LIGHT SOURCE CODE ISV-1LED1


SPECIFICATION

Color temperature	5600K
Cooling	fan cooling
Power	AC110~220V, 50/60Hz
Dimension	400×300×112mm
Weight	7kg

STANDARD DELIVERY

Main unit	1pc
1.8m optical fiber cable	1pc

- For rigid borescopes (code ISV-1Hxx)
- Connected to computer USB port
- Auto-exposure, auto-gain, auto white balance
- Focus is adjustable

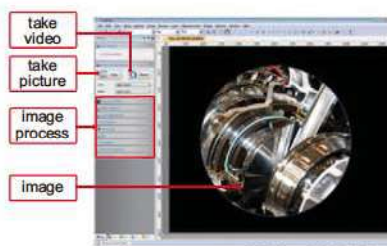

CAMERA CODE ISV-1CAM



SPECIFICATION

Sensor	color CMOS
Pixel	1.3M
Resolution	1280×1024
Frame rate	15~50fps
Software	take picture, take video, zoom in, zoom out, image rotation
Power supply	USB

STANDARD DELIVERY

Camera	1pc
Connector	1pc
USB cable and software	1pc

IP67
WATERPROOF


- Dust/waterproof level: IP67
- Lens can be used in the liquid with temperature -10°C~100°C
- LED light source is needed



camera (optional)



LED light source (optional)

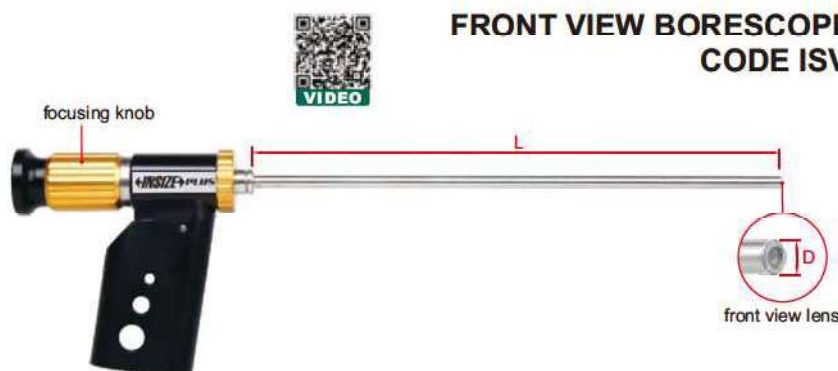

FRONT VIEW BORESCOPE (RIGID) CODE ISV-HF4030



SPECIFICATION


Diameter (D)	4mm
Length (L)	300mm
Depth of view	>15mm
Dust/waterproof lens	IP67
Dimension	410×105×30mm
Weight	220g

STANDARD DELIVERY


Main unit	1pc
Handle	1pc

OPTIONAL ACCESSORY

LED light source	ISV-HL3000
Camera and software	ISV-HCAM



adjustable focus distance



angle of view