



## Kombi-Aufsteckfräserdorne DIN 6358

Combi shell mill holders DIN 6358

Porte-fraises à double usage DIN 6358

JIS B 6339



### Verwendung:


Zur Aufnahme von Walzen-, Walzenstirnfräsern oder Messerköpfen mit Längs- oder Quernut.

### Application:

For mounting milling cutters with transverse or longitudinal groove.

### Application:

Pour le serrage de fraises à rainure transversale ou à rainure longitudinale.

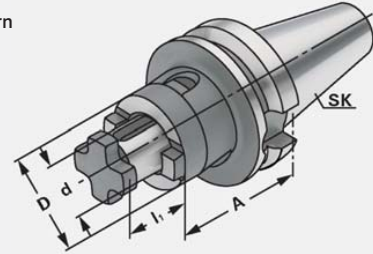

JIS B 6339



$\nabla \leq 0,005$

G6,3  
15.000 min<sup>-1</sup>

CAD

Bestell-Nr.  
Order no.  
Référence

SK

d<sub>h6</sub>

A

l<sub>1</sub>

D

305.10.16 \*

BT 30

16

45

17

32

305.10.22 \*

BT 30

22

47

19

40

305.10.27 \*

BT 30

27

49

21

48

406.10.16

BT 40

16

55

17

32

406.10.22

BT 40

22

55

19

40

406.10.27

BT 40

27

55

21

48

406.10.32

BT 40

32

60

24

58

406.10.40

BT 40

40

60

27

70

406.10.16.1

BT 40

16

100

17

32

406.10.22.1

BT 40

22

100

19

40

406.10.27.1

BT 40

27

100

21

48

406.10.32.1

BT 40

32

100

24

58

406.10.40.1

BT 40

40

100

27

70

406.10.16.2

BT 40

16

160

17

32

406.10.22.2

BT 40

22

160

19

40

406.10.27.2

BT 40

27

160

21

48

406.10.32.2

BT 40

32

160

24

58

406.10.40.2

BT 40

40

160

27

70

\* JIS B 6339 Form AD

\* JIS B 6339 form AD

\* JIS B 6339 forme AD

### Lieferumfang:

Mit Fräseranzugsschraube, Mitnehmerring und Passfeder

### Delivery:

With tightening bolt, driving ring and feather key

### Livraison:

Avec vis de blocage, bague d'entraînement et clavette



8.87



8.85



8.87



8.61