



Kombi-Aufsteckfräserdorne DIN 6358

Combi shell mill holders DIN 6358

Porte-fraises à double usage DIN 6358

DIN 69871

1



Verwendung:


Zur Aufnahme von Walzen-, Walzenstirnfräsern oder Messerköpfen mit Längs- oder Quernut.

Application:

For mounting milling cutters with transverse or longitudinal groove.

Application:

Pour le serrage de fraises à rainure transversale ou à rainure longitudinale.

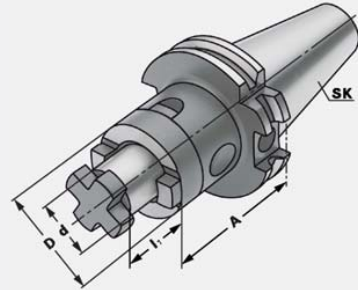

DIN 69871



$\nabla \leq 0,005$

G6,3
15.000 min⁻¹

CAD

Bestell-Nr.
Order no.
Référence

SK

d_{h6}

A

l₁

D

302.10.16 *

SK 30

16

50

17

32

302.10.22 *

SK 30

22

50

19

40

302.10.27 *

SK 30

27

55

21

48

302.10.32 *

SK 30

32

60

24

58

403.10.16

SK 40

16

55

17

32

403.10.22

SK 40

22

55

19

40

403.10.27

SK 40

27

55

21

48

403.10.32

SK 40

32

60

24

58

403.10.40

SK 40

40

60

27

70

403.10.16.1

SK 40

16

100

17

32

403.10.22.1

SK 40

22

100

19

40

403.10.27.1

SK 40

27

100

21

48

403.10.32.1

SK 40

32

100

24

58

403.10.40.1

SK 40

40

100

27

70

403.10.16.2

SK 40

16

160

17

32

403.10.22.2

SK 40

22

160

19

40

403.10.27.2

SK 40

27

160

21

48

403.10.32.2

SK 40

32

160

24

58

403.10.40.2

SK 40

40

160

27

70

* DIN 69871 Form AD

* DIN 69871 form AD

* DIN 69871 forme AD

Lieferumfang:

Delivery:

Livraison:

Mit Fräseranzugsschraube, Mitnehmerring und Passfeder

With retaining screw, driving ring and feather key

Avec vis de serrage, bague d'entraînement et clavette



8.87



8.85



8.87



8.61