


FINISH HEADS 90° APPROACH

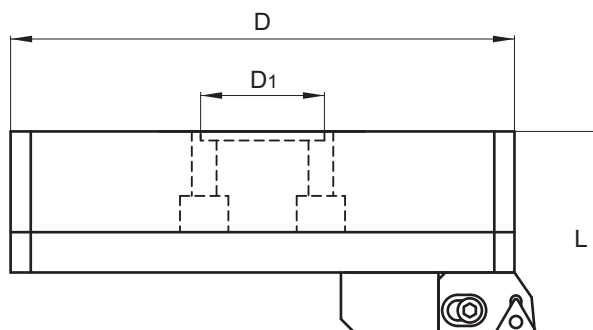

LARGE DIAMETER CARTRIDGE TYPE HEADS ADJUSTING ACCURACY 0.002 mm Ø

Bore Range	Dimension		Product Number	Cartridge *	Clamp Screw	Kg.	Adjusting Accuracy				
	Min	Max					øD	øD1	L	Adj. Key	Clamp Key
220	320	202	60	90	A300 90 300	3CT 90 300	TT 300	9.300	5	T15	4
220	320	202	60	90	A300 90 402	3CT 90 402	TT 402	9.300	5	T20	4
220	320	202	60	90	A300 90 402N	3CT 90 402N	TT 402N	9.300	5	2.5	4
290	400	272	60	90	A400 90 300	3CT 90 300	TT 300	12.950	5	T15	4
290	400	272	60	90	A400 90 402	3CT 90 402	TT 402	12.950	5	T20	4
290	400	272	60	90	A400 90 402N	3CT 90 402N	TT 402N	12.950	5	2.5	4
370	500	352	60	90	A500 90 300	3CT 90 300	TT 300	16.250	5	T15	4
370	500	352	60	90	A500 90 402	3CT 90 402	TT 402	16.250	5	T20	4
370	500	352	60	90	A500 90 402N	3CT 90 402N	TT 402N	16.250	5	2.5	4

* FULL CARTRIDGE INFORMATION (INCLUDING INSERT SIZE) IN PAGE 19