


ROUGH HEADS 90° APPROACH

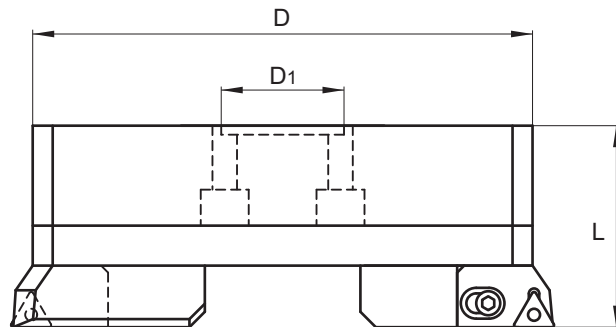

LARGE DIAMETER CARTRIDGE TYPE HEADS SYNCHRONIZED ADJUSTMENT

Bore Range Min Max	Dimension			Product Number	Cartridge *	Clamp Screw	Kg.	Adjustment		
	øD	øD1	L					Adj. Key	Clamp Key	Locking Key
220 320	202	60	90	D300 90 300	3CT 90 300	TT 300	10.100	5	T15	4
220 320	202	60	90	D300 90 402	3CT 90 402	TT 402	10.100	5	T20	4
220 320	202	60	90	D300 90 402N	3CT 90 402N	TT 402N	10.100	5	2.5	4
290 400	272	60	90	D400 90 300	3CT 90 300	TT 300	13.750	5	T15	4
290 400	272	60	90	D400 90 402	3CT 90 402	TT 402	13.750	5	T20	4
290 400	272	60	90	D400 90 402N	3CT 90 402N	TT 402N	13.750	5	2.5	4
370 500	352	60	90	D500 90 300	3CT 90 300	TT 300	16.900	5	T15	4
370 500	352	60	90	D500 90 402	3CT 90 402	TT 402	16.900	5	T20	4
370 500	352	60	90	D500 90 402N	3CT 90 402N	TT 402N	16.900	5	2.5	4

* FULL CARTRIDGE INFORMATION (INCLUDING INSERT SIZE) IN PAGE 19