


# HHT / HHF

Mega Bore 2, 4-Jaw High-Speed Open-Center Chuck



- Mega Bore 2-jaw, 4-jaw high-speed wedge-type open-center power chuck

HYDRAULIC CHUCK

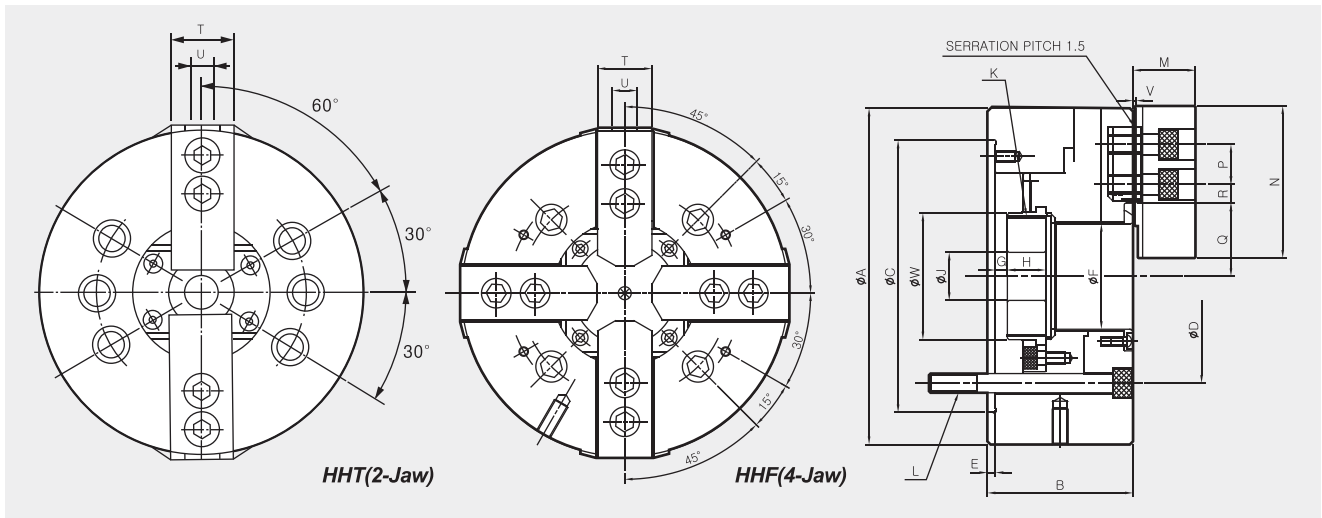

## Dimensions

	A	B	C(H6)	D	E	F	Gmax.	Gmin.	H	J	Kmax.	L	M	N	P	Qmax.	Qmin.	Rmax.	Rmin.	T	U	V	W
HHT-206	175	81	40	104.8	5	52	14	-1	17.5	20	M60×2.0	6-M10× 95	32	72	20	38	34.8	21.75	10.25	31	12	2	65
HHT-208	210	91	170	133.4	5	66	7.5	-10	27	30	M75×2.0	6-M12×115	39	95	25	45.7	42	23.75	11.75	35	14	2	80
HHF-208	210	91	170	133.4	5	66	7.5	-10	27	30	M75×2.0	4-M12×115	39	95	25	45.7	42	23.75	11.75	35	14	2	80

## Specifications

	Thru Hole Diameter(mm)	Grip Dia. (mm)		Jaw STROKE Diameter. (mm)	PLUNGER STROKE (mm)	Permissible Input Force KN(kgf)	Max. Static Gripping Force KN(kgf)	Max. r.p.m min~(r.p.m)	weight kgf	GD <sup>2</sup> N·m <sup>2</sup> (kgf·m <sup>2</sup> )	Operating Cylinder	Max. Hydraulic Pressure MPa(kgf/cm <sup>2</sup> )	Operating HARD JAW	KITAGAWA Model
		Max.	Min.											
HHT-206	52	175	16.5	6.5	15	16.6(1700)	38(3875)	6000	11.5	2.2(0.225)	SH-15052 (SYH-1552)	1.18(12)	-	-
HHT-208	66	210	23	7.4	17.5	23.5(5914)	85(5914)	5000	21.7	6.47(0.66)	SH-17068 (SYH-1768)	1.59(16.3)	-	-
HHF-208	66	210	23	7.4	17.5	23.5(2397)	57.9(5914)	5000	23.5	5.59(0.57)	SH-17068 (SYH-1768)	16(16.4)	HB08A1	-

※Maximum turning speed is based on actual measurements.  
 ※Specifications are subject to change without notice.