




MCA

Stationary Pneumatic Chuck

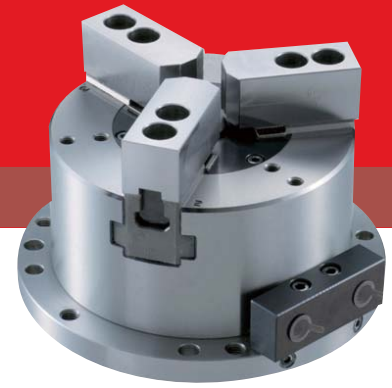

PNEUMATIC CHUCK

- Compact design with self contained cylinder allows more clearance
- Suitable for long workpieces
- Compatible with air blowing
- Relief valve ensures safe operation during power loss

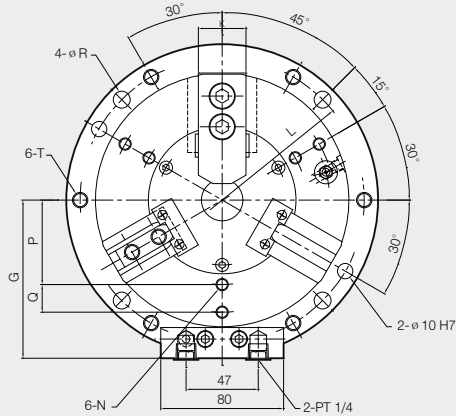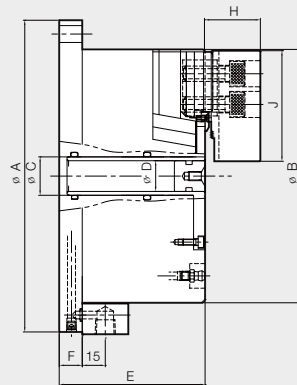

Dimensions

	ΦA	ΦB	ΦC	ΦD	E	F	G	H	J	K	N	L(P.C.D)	Q	ΦR	T
MCA-04	148	110	20	-	90	15	75.5	27	55	23	M8	130	-	9	M10
MCA-06	203	165	25	20	95	15	103	36	72	31	M8	185	18	11	M10
MCA-08	248	210	36	30	106	15	125.5	42	95	35	M8	230	25	11	M10
MCA-10	300	254	50	43	110	16	147.5	46	110	40	M10	280	30	13	M12

Specifications

	CLAMPING FORCE (Kgf) Pneumatic 6bar	Jaw stroke mm(dia)	Chucking diameter (mm)		Max. Pneumatic pressure (bar)	Weight (Kg)
			MAX. (mm)	MIN. (mm)		
MCA-04	765	5.2	110	10	7	7.3
MCA-06	2140	5.2	165	23	7	16
MCA-08	3300	6.3	210	30	7	28
MCA-10	4800	6.3	254	50	7	43