



STRAIGHT SHANK DRILLS

D1105 SERIES


HSS, STRAIGHT SHANK TWIST DRILLS HSS, SPIRALBOHRER mit ZYLINDERSCHAFT

JOBBER

KURZ

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2 mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.



DIN 338
HSS
N 20~30°
h8
118°
P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105003	0.3	3	19	D1105921	2.15	27	53
D1105004	0.4	5	20	D1105022	2.2	27	53
D1105005	0.5	6	22	D1105922	2.25	27	53
D1105006	0.6	7	24	D1105023	2.3	27	53
D1105007	0.7	9	28	D1105923	2.35	27	53
D1105008	0.8	10	30	D1105024	2.4	30	57
D1105009	0.9	11	32	D1105924	2.45	30	57
D1105010	1.0	12	34	D1105025	2.5	30	57
D1105910	1.05	12	34	D1105925	2.55	30	57
D1105011	1.1	14	36	D1105026	2.6	30	57
D1105911	1.15	14	36	D1105926	2.65	30	57
D1105012	1.2	16	38	D1105027	2.7	33	61
D1105912	1.25	16	38	D1105927	2.75	33	61
D1105013	1.3	16	38	D1105028	2.8	33	61
D1105913	1.35	18	40	D1105928	2.85	33	61
D1105014	1.4	18	40	D1105029	2.9	33	61
D1105914	1.45	18	40	D1105929	2.95	33	61
D1105015	1.5	18	40	D1105030	3.0	33	61
D1105915	1.55	20	43	D1105930	3.05	36	65
D1105016	1.6	20	43	D1105031	3.1	36	65
D1105916	1.65	20	43	D1105931	3.15	36	65
D1105017	1.7	20	43	D1105032	3.2	36	65
D1105917	1.75	22	46	D1105932	3.25	36	65
D1105018	1.8	22	46	D1105033	3.3	36	65
D1105918	1.85	22	46	D1105933	3.35	36	65
D1105019	1.9	22	46	D1105034	3.4	39	70
D1105919	1.95	24	49	D1105934	3.45	39	70
D1105020	2.0	24	49	D1105035	3.5	39	70
D1105920	2.05	24	49	D1105935	3.55	39	70
D1105021	2.1	24	49	D1105036	3.6	39	70

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	○	○	○			

CARBIDE

HSS

I-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL TYPE

DREAM DRILLS for HARDENED STEELS

GENERAL CARBIDE DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

TECHNICAL DATA



STRAIGHT SHANK DRILLS

D1105 SERIES


HSS, STRAIGHT SHANK TWIST DRILLS HSS, SPIRALBOHRER mit ZYLINDERSCHAFT

JOBBER

KURZ

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2 mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.

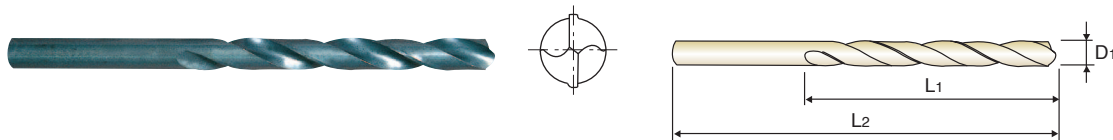

DIN 338
HSS
N 20~30°
h8
118°
P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105936	3.65	39	70	D1105951	5.15	52	86
D1105037	3.7	39	70	D1105052	5.2	52	86
D1105937	3.75	39	70	D1105952	5.25	52	86
D1105038	3.8	43	75	D1105053	5.3	52	86
D1105938	3.85	43	75	D1105953	5.35	57	93
D1105039	3.9	43	75	D1105054	5.4	57	93
D1105939	3.95	43	75	D1105954	5.45	57	93
D1105040	4.0	43	75	D1105055	5.5	57	93
D1105940	4.05	43	75	D1105955	5.55	57	93
D1105041	4.1	43	75	D1105056	5.6	57	93
D1105941	4.15	43	75	D1105956	5.65	57	93
D1105042	4.2	43	75	D1105057	5.7	57	93
D1105942	4.25	43	75	D1105957	5.75	57	93
D1105043	4.3	47	80	D1105058	5.8	57	93
D1105943	4.35	47	80	D1105958	5.85	57	93
D1105044	4.4	47	80	D1105059	5.9	57	93
D1105944	4.45	47	80	D1105959	5.95	57	93
D1105045	4.5	47	80	D1105060	6.0	57	93
D1105945	4.55	47	80	D1105960	6.05	63	101
D1105046	4.6	47	80	D1105061	6.1	63	101
D1105946	4.65	47	80	D1105961	6.15	63	101
D1105047	4.7	47	80	D1105062	6.2	63	101
D1105947	4.75	47	80	D1105962	6.25	63	101
D1105048	4.8	52	86	D1105063	6.3	63	101
D1105948	4.85	52	86	D1105963	6.35	63	101
D1105049	4.9	52	86	D1105064	6.4	63	101
D1105949	4.95	52	86	D1105964	6.45	63	101
D1105050	5.0	52	86	D1105065	6.5	63	101
D1105950	5.05	52	86	D1105965	6.55	63	101
D1105051	5.1	52	86	D1105066	6.6	63	101

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	○	○	○			

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL TYPE

DREAM DRILLS for HARDENED STEELS

GENERAL CARBIDE DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

TECHNICAL DATA



STRAIGHT SHANK DRILLS


D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS HSS, SPIRALBOHRER mit ZYLINDERSCHAFT

JOBBER**KURZ**

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2 mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.

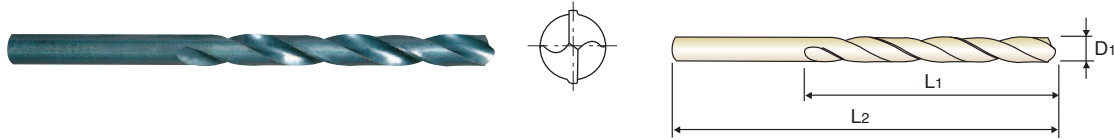

DIN 338
HSS
N 20~30°
h8
118°
P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105966	6.65	63	101	D1105982	8.25	75	117
D1105067	6.7	63	101	D1105083	8.3	75	117
D1105967	6.75	69	109	D1105084	8.4	75	117
D1105068	6.8	69	109	D1105085	8.5	75	117
D1105968	6.85	69	109	D1105086	8.6	81	125
D1105069	6.9	69	109	D1105087	8.7	81	125
D1105969	6.95	69	109	D1105987	8.75	81	125
D1105070	7.0	69	109	D1105088	8.8	81	125
D1105970	7.05	69	109	D1105089	8.9	81	125
D1105071	7.1	69	109	D1105090	9.0	81	125
D1105971	7.15	69	109	D1105091	9.1	81	125
D1105072	7.2	69	109	D1105092	9.2	81	125
D1105972	7.25	69	109	D1105992	9.25	81	125
D1105073	7.3	69	109	D1105093	9.3	81	125
D1105973	7.35	69	109	D1105094	9.4	81	125
D1105074	7.4	69	109	D1105095	9.5	81	125
D1105974	7.45	69	109	D1105096	9.6	87	133
D1105075	7.5	69	109	D1105097	9.7	87	133
D1105975	7.55	75	117	D1105997	9.75	87	133
D1105076	7.6	75	117	D1105098	9.8	87	133
D1105976	7.65	75	117	D1105099	9.9	87	133
D1105077	7.7	75	117	D1105100	10.0	87	133
D1105977	7.75	75	117	D1105101	10.1	87	133
D1105078	7.8	75	117	D1105102	10.2	87	133
D1105978	7.85	75	117	D1105802	10.25	87	133
D1105079	7.9	75	117	D1105103	10.3	87	133
D1105979	7.95	75	117	D1105104	10.4	87	133
D1105080	8.0	75	117	D1105105	10.5	87	133
D1105081	8.1	75	117	D1105106	10.6	87	133
D1105082	8.2	75	117	D1105107	10.7	94	142

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	○	○	○			

Y/G STRAIGHT SHANK DRILLS

D1105 SERIES


HSS, STRAIGHT SHANK TWIST DRILLS HSS, SPIRALBOHRER mit ZYLINDERSCHAFT

JOBBER

KURZ

- ▶ **Surface treatment** : Steam Tempered(Black Oxide Finish)
Bright Finish under 2mm
- ▶ **Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

- ▶ **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
Helle Beschaffenheit unter 2 mm
- ▶ **Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.

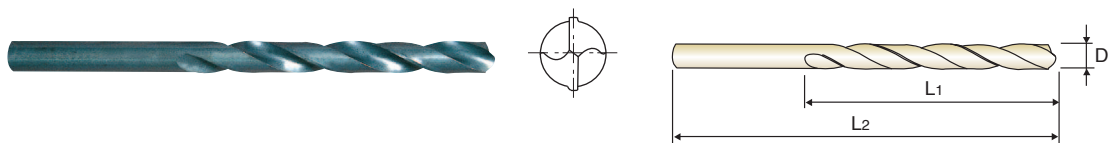

DIN 338
HSS
N 20~30°
h8
118°
P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1105807	10.75	94	142	D1105832	13.25	108	160
D1105108	10.8	94	142	D1105135	13.5	108	160
D1105109	10.9	94	142	D1105837	13.75	108	160
D1105110	11.0	94	142	D1105140	14.0	108	160
D1105111	11.1	94	142	D1105842	14.25	114	169
D1105112	11.2	94	142	D1105145	14.5	114	169
D1105812	11.25	94	142	D1105847	14.75	114	169
D1105113	11.3	94	142	D1105150	15.0	114	169
D1105114	11.4	94	142	D1105852	15.25	120	178
D1105115	11.5	94	142	D1105155	15.5	120	178
D1105116	11.6	94	142	D1105857	15.75	120	178
D1105117	11.7	94	142	D1105160	16.0	120	178
D1105817	11.75	94	142	D1105862	16.25	125	184
D1105118	11.8	94	142	D1105165	16.5	125	184
D1105119	11.9	101	151	D1105867	16.75	125	184
D1105120	12.0	101	151	D1105170	17.0	125	184
D1105121	12.1	101	151	D1105872	17.25	130	191
D1105122	12.2	101	151	D1105175	17.5	130	191
D1105822	12.25	101	151	D1105877	17.75	130	191
D1105123	12.3	101	151	D1105180	18.0	130	191
D1105124	12.4	101	151	D1105882	18.25	135	198
D1105125	12.5	101	151	D1105185	18.5	135	198
D1105126	12.6	101	151	D1105887	18.75	135	198
D1105127	12.7	101	151	D1105190	19.0	135	198
D1105827	12.75	101	151	D1105892	19.25	140	205
D1105128	12.8	101	151	D1105195	19.5	140	205
D1105129	12.9	101	151	D1105897	19.75	140	205
D1105130	13.0	101	151	D1105200	20.0	140	205

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	○	○	○			

◎ : Excellent ○ : Good



STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

HSS & HSS 8% COBALT DRILLS, DIN1897, DIN338, DIN340, DIN1869 HSS & HSSCo8 SPIRALBOHRER, DIN 1897, DIN 338, DIN 340, DIN 1869

D1107, D2107, D1105, D1125, D2105, DL105, D2104, D1121 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		CARBON STEELS		ALLOY STEELS		ALLOY STEELS		STAINLESS STEELS		TITANIUM ALLOYS	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 28		HRC23 ~ 34		HRC34 ~ 38		HRC23			
STRENGTH	~ 570 N/mm ²		~ 830 N/mm ²		830 ~ 950 N/mm ²		830 ~ 1110 N/mm ²		1110 ~ 1260 N/mm ²		830 N/mm ²		410 N/mm ²	
DRILLING SPEED	22 ~ 27 m/min		15 ~ 20 m/min		10 ~ 15 m/min		15 ~ 20 m/min		8 ~ 12 m/min		15 ~ 20 m/min		8 ~ 12 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
2.5	3380	0.025	2550	0.025	1900	0.015	2380	0.020	1400	0.015	2550	0.025	1400	0.020
3.0	2700	0.050	2000	0.050	1500	0.025	1880	0.050	1100	0.020	2000	0.050	1100	0.025
5.0	1700	0.063	1280	0.063	960	0.038	1190	0.063	700	0.025	1280	0.063	700	0.038
8.0	1050	0.130	780	0.130	590	0.076	730	0.130	430	0.038	780	0.130	430	0.076
11.0	750	0.150	560	0.150	425	0.076	520	0.180	310	0.050	560	0.150	430	0.076
19.0	440	0.230	330	0.230	255	0.130	300	0.230	180	0.050	330	0.230	180	0.130
31.0	260	0.280	195	0.280	145	0.180	180	0.280	107	0.076	195	0.280	107	0.180

WORK MATERIAL	TOOL STEELS		CAST IRON		ALUMINUM ALLOYS		MAGNESIUM ALLOYS		ZINC ALLOYS		PLASTICS	
	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC21									
STRENGTH	~ 270 N/mm ²		~ 800 N/mm ²									
DRILLING SPEED	20 ~ 25 m/min		15 ~ 20 m/min		45 ~ 50 m/min		55 ~ 65 m/min		40 ~ 50 m/min		20 ~ 25 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S
2.5	3180	0.042	2250	0.025	6400	0.038	8600	0.038	6400	0.038	3380	0.025
3.0	2500	0.050	2000	0.050	5000	0.063	6800	0.063	5000	0.063	2700	0.050
5.0	1590	0.063	1280	0.063	3200	0.076	4300	0.076	3200	0.076	1700	0.063
8.0	970	0.130	780	0.130	2000	0.180	2600	0.180	2000	0.180	1050	0.130
11.0	700	0.180	560	0.150	1400	0.200	1900	0.200	1400	0.200	750	0.150
19.0	440	0.230	330	0.230	820	0.300	1100	0.300	820	0.300	440	0.230
31.0	240	0.300	195	0.280	490	0.380	660	0.380	490	0.380	260	0.280

N = R.P.M
S = Feed per Revolution (mm/rev.)

HSS-E, TWIST DRILLS for HEAVY DUTY, DIN338 HSS-E, SPIRALBOHRER für HOHELEISTUNGEN, DIN 338

DL109 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		CARBON STEELS		ALLOY STEELS		ALLOY STEELS		STAINLESS STEELS		CAST IRON	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 28		HRC23 ~ 34		HRC34 ~ 38		HRC23		HRC21	
STRENGTH	~ 570 N/mm ²		~ 830 N/mm ²		830 ~ 950 N/mm ²		830 ~ 1110 N/mm ²		1110 ~ 1260 N/mm ²		830 N/mm ²		800 N/mm ²	
DRILLING SPEED	25 ~ 30 m/min		20 ~ 25 m/min		15 ~ 20 m/min		18 ~ 23 m/min		10 ~ 15 m/min		27 ~ 33 m/min		27 ~ 33 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
2.0	5000	0.03	3750	0.03	2850	0.02	3500	0.02	2070	0.02	5000	0.03	5000	0.03
3.0	3750	0.04	2810	0.04	2150	0.02	2625	0.04	1560	0.02	3750	0.04	3750	0.04
4.0	2500	0.06	1870	0.06	1450	0.03	1750	0.06	1050	0.02	2500	0.06	2500	0.06
5.0	2085	0.07	1560	0.07	1205	0.04	1460	0.07	870	0.03	2085	0.07	2085	0.07
6.0	1670	0.08	1250	0.08	960	0.05	1170	0.09	690	0.03	1670	0.08	1670	0.08
7.0	1460	0.10	1095	0.10	840	0.06	1025	0.11	605	0.03	1460	0.10	1460	0.10
8.0	1250	0.13	940	0.13	720	0.08	880	0.13	520	0.04	1250	0.13	1250	0.13
9.0	1125	0.14	845	0.14	645	0.08	790	0.15	465	0.04	1125	0.14	1125	0.14
10.0	1000	0.14	750	0.14	570	0.08	700	0.16	410	0.05	1000	0.14	1000	0.14
11.0	925	0.15	685	0.15	525	0.08	640	0.18	380	0.05	925	0.15	925	0.15
12.0	850	0.16	620	0.16	480	0.08	580	0.19	350	0.05	850	0.16	850	0.16
13.0	785	0.17	575	0.17	445	0.09	540	0.20	325	0.05	785	0.17	785	0.17

N = R.P.M
S = Feed per Revolution (mm/rev.)