



STRAIGHT SHANK DRILLS


D1121 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS
HSS, SPIRALBOHRER mit ZYLINDERSCHAFT

EXTRA LONG
ÜBERLANG

► **Surface treatment** : Steam Tempered(Black Oxide Finish)
 ► **Application** : Designed for drilling deep holes or deeply located holes
 Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

► **Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
 ► **Verwendung** : Standardbohrer zum Bohren extrem tiefer Löcher, zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphit.

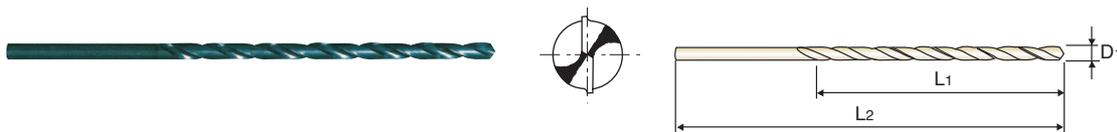

DIN 1869/1 HSS N 20~30° h8 118° P.215

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length	EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2		D1	L1	L2
D1121020	2.0	85	125	D1121080	8.0	165	240
D1121025	2.5	95	140	D1121085	8.5	165	240
D1121030	3.0	100	150	D1121090	9.0	175	250
D1121035	3.5	115	165	D1121095	9.5	175	250
D1121040	4.0	120	175	D1121100	10.0	185	265
D1121045	4.5	125	185	D1121105	10.5	185	265
D1121050	5.0	135	195	D1121110	11.0	195	280
D1121055	5.5	140	205	D1121115	11.5	195	280
D1121060	6.0	140	205	D1121120	12.0	205	295
D1121065	6.5	150	215	D1121125	12.5	205	295
D1121070	7.0	155	225	D1121130	13.0	205	295
D1121075	7.5	155	225				

i-DREAM DRILLS

DREAM DRILLS -GENERAL

DREAM DRILLS -INOX

DREAM DRILLS -ALU

DREAM DRILLS -CFRP

DREAM DRILLS -MQL TYPE

DREAM DRILLS for HARDENED STEELS

GENERAL CARBIDE DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

MULTI-1 DRILLS

HPD DRILLS

GOLD-P DRILLS

STRAIGHT SHANK DRILLS

TAPER SHANK DRILLS

NC-SPOTTING DRILLS

CENTER DRILLS

SPADE DRILLS

TECHNICAL DATA

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		Cast Iron	Aluminum	Stainless Steels	Titanium	Mild Steels	Copper	Bronze	CFRP
~HB225	HB225~325	HRc30~45	HRc45~55	HRc55~								
◎	◎				○	○	○	○	○			



STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS EMPFOHLENE SCHNEIDKONDITIONEN

HSS & HSS 8% COBALT DRILLS, DIN1897, DIN338, DIN340, DIN1869 HSS & HSSCo8 SPIRALBOHRER, DIN 1897, DIN 338, DIN 340, DIN 1869

D1107, D2107, D1105, D1125, D2105, DL105, D2104, D1121 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		CARBON STEELS		ALLOY STEELS		ALLOY STEELS		STAINLESS STEELS		TITANIUM ALLOYS	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 28		HRC23 ~ 34		HRC34 ~ 38		HRC23			
STRENGTH	~ 570 N/mm ²		~ 830 N/mm ²		830 ~ 950 N/mm ²		830 ~ 1110 N/mm ²		1110 ~ 1260 N/mm ²		830 N/mm ²		410 N/mm ²	
DRILLING SPEED	22 ~ 27 m/min		15 ~ 20 m/min		10 ~ 15 m/min		15 ~ 20 m/min		8 ~ 12 m/min		15 ~ 20 m/min		8 ~ 12 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
2.5	3380	0.025	2550	0.025	1900	0.015	2380	0.020	1400	0.015	2550	0.025	1400	0.020
3.0	2700	0.050	2000	0.050	1500	0.025	1880	0.050	1100	0.020	2000	0.050	1100	0.025
5.0	1700	0.063	1280	0.063	960	0.038	1190	0.063	700	0.025	1280	0.063	700	0.038
8.0	1050	0.130	780	0.130	590	0.076	730	0.130	430	0.038	780	0.130	430	0.076
11.0	750	0.150	560	0.150	425	0.076	520	0.180	310	0.050	560	0.150	430	0.076
19.0	440	0.230	330	0.230	255	0.130	300	0.230	180	0.050	330	0.230	180	0.130
31.0	260	0.280	195	0.280	145	0.180	180	0.280	107	0.076	195	0.280	107	0.180

WORK MATERIAL	TOOL STEELS		CAST IRON		ALUMINUM ALLOYS		MAGNESIUM ALLOYS		ZINC ALLOYS		PLASTICS	
	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC21									
STRENGTH	~ 270 N/mm ²		~ 800 N/mm ²									
DRILLING SPEED	20 ~ 25 m/min		15 ~ 20 m/min		45 ~ 50 m/min		55 ~ 65 m/min		40 ~ 50 m/min		20 ~ 25 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S
2.5	3180	0.042	2250	0.025	6400	0.038	8600	0.038	6400	0.038	3380	0.025
3.0	2500	0.050	2000	0.050	5000	0.063	6800	0.063	5000	0.063	2700	0.050
5.0	1590	0.063	1280	0.063	3200	0.076	4300	0.076	3200	0.076	1700	0.063
8.0	970	0.130	780	0.130	2000	0.180	2600	0.180	2000	0.180	1050	0.130
11.0	700	0.180	560	0.150	1400	0.200	1900	0.200	1400	0.200	750	0.150
19.0	440	0.230	330	0.230	820	0.300	1100	0.300	820	0.300	440	0.230
31.0	240	0.300	195	0.280	490	0.380	660	0.380	490	0.380	260	0.280

N = R.P.M
S = Feed per Revolution (mm/rev.)

HSS-E, TWIST DRILLS for HEAVY DUTY, DIN338 HSS-E, SPIRALBOHRER für HOHELEISTUNGEN, DIN 338

DL109 SERIES

WORK MATERIAL	CARBON STEELS		CARBON STEELS		CARBON STEELS		ALLOY STEELS		ALLOY STEELS		STAINLESS STEELS		CAST IRON	
	N	S	N	S	N	S	N	S	N	S	N	S	N	S
HARDNESS			~ HRC23		~ HRC23 ~ 28		HRC23 ~ 34		HRC34 ~ 38		HRC23		HRC21	
STRENGTH	~ 570 N/mm ²		~ 830 N/mm ²		830 ~ 950 N/mm ²		830 ~ 1110 N/mm ²		1110 ~ 1260 N/mm ²		830 N/mm ²		800 N/mm ²	
DRILLING SPEED	25 ~ 30 m/min		20 ~ 25 m/min		15 ~ 20 m/min		18 ~ 23 m/min		10 ~ 15 m/min		27 ~ 33 m/min		27 ~ 33 m/min	
DIAMETER	N	S	N	S	N	S	N	S	N	S	N	S	N	S
2.0	5000	0.03	3750	0.03	2850	0.02	3500	0.02	2070	0.02	5000	0.03	5000	0.03
3.0	3750	0.04	2810	0.04	2150	0.02	2625	0.04	1560	0.02	3750	0.04	3750	0.04
4.0	2500	0.06	1870	0.06	1450	0.03	1750	0.06	1050	0.02	2500	0.06	2500	0.06
5.0	2085	0.07	1560	0.07	1205	0.04	1460	0.07	870	0.03	2085	0.07	2085	0.07
6.0	1670	0.08	1250	0.08	960	0.05	1170	0.09	690	0.03	1670	0.08	1670	0.08
7.0	1460	0.10	1095	0.10	840	0.06	1025	0.11	605	0.03	1460	0.10	1460	0.10
8.0	1250	0.13	940	0.13	720	0.08	880	0.13	520	0.04	1250	0.13	1250	0.13
9.0	1125	0.14	845	0.14	645	0.08	790	0.15	465	0.04	1125	0.14	1125	0.14
10.0	1000	0.14	750	0.14	570	0.08	700	0.16	410	0.05	1000	0.14	1000	0.14
11.0	925	0.15	685	0.15	525	0.08	640	0.18	380	0.05	925	0.15	925	0.15
12.0	850	0.16	620	0.16	480	0.08	580	0.19	350	0.05	850	0.16	850	0.16
13.0	785	0.17	575	0.17	445	0.09	540	0.20	325	0.05	785	0.17	785	0.17

N = R.P.M
S = Feed per Revolution (mm/rev.)